

**HIGH-EFFICIENCY  
SPLIT SYSTEM HEAT PUMP  
UP TO 15.2 SEER2 & 7.8 HSPF2  
1½ TO 5 TONS**



**Contents**

Nomenclature..... 2  
 Product Specifications..... 3  
 Expanded Cooling Data..... 4  
 Expanded Heating Data..... 18  
 Performance Data ..... 20  
 Dimensions ..... 21  
 Wiring Diagrams ..... 22  
 Accessories ..... 25

**Standard Features**

- High-efficiency scroll compressor
- SmartShift® technology to ensure quiet reliable defrost
- Copper tube/ enhanced aluminum fin coil- 5mm diameter on 1.5-3.5T
- Factory-installed suction-line accumulator
- Factory-installed compressor crankcase heater
- Factory-installed high-capacity muffler
- High- and low-pressure switches
- Service valves with sweat connections and easy access to gauge ports
- Fully charged for 15’ of tubing length
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

**Cabinet Features**

- Removable grille style top design compliant with UL 60335-2-40
- Steel louver coil guard
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2020 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



\* Complete warranty details available from your local dealer or at [www.goodmanmfg.com](http://www.goodmanmfg.com). To receive the 2-Year Unit Replacement Limited Warranty and 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

	G	S	Z	H	5	0	36	1	0	AA	
	1	2	3	4	5	6	7,8	9	10	11, 12	
<b>Brand</b>	G Goodman® Brand										<b>Engineering</b>
											Major/Minor Revisions
											A - Initial Release
											B - 1st Revision
<b>Product Category</b>	S Split System R-410A										<b>Variation</b>
<b>Unit Type - Split System</b>	X Condenser										<b>Electrical</b>
	Z Heat Pump										1 208/230 V, 1 Phase, 60 Hz
<b>Feature</b>	N Value										<b>Nominal Capacity</b>
	H Enhanced										018 - 1½ tons
	B Classic										042 3½ Tons
	C Premium										024 - 2 tons
	M Multi-Family										048 4 Tons
	V Ultimate										030 - 2½ tons
											060 5 Tons
											036 - 3 tons
<b>SEER2</b>	13.4 - 13.7 = 3										<b>Sales Region</b>
	16.6 - 17.5 = 7										N North
	13.8 - 14.5 = 4										S Southeast & North
	17.6 - 18.5 = 8										0 All Regions
	14.6 - 15.5 = 5										
	18.6 - 19.5 = 9										
	15.6 - 16.5 = 6										
	19.6 + = 0										

	GSZH5 01810A*	GSZH5 02410A*	GSZH5 03010A*	GSZH5 03610A*	GSZH5 04210A*	GSZH5 04810A*	GSZH5 06010A*
<b>NOMINAL CAPACITIES</b>							
Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Heating (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
SEER2	15.2	15.2	15.2	15.2	15.2	15.2	15.2
Decibels	68	72	69	72	75	74	76
<b>COMPRESSOR</b>							
RLA	9.0	11.5	14.1	16.0	17.7	19.9	23.7
LRA	42.6	59.5	67.9	91.9	110.2	110.0	151.0
Stage	Single	Single	Single	Single	Single	Single	Two
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
<b>CONDENSER FAN MOTOR</b>							
Horsepower	1/6	1/6	1/6	1/3	1/4	1/4	1/5
FLA	0.95	0.97	0.97	2.8	1.3	1.3	1.0
<b>REFRIGERATION SYSTEM</b>							
Refrigerant Line Size <sup>1</sup>							
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Connection Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge (oz.)	106	118	119	114	167	222	276
<b>ELECTRICAL DATA</b>							
Volts/Phase (60 Hz)	208/230	208/230	208/230	208/230	208/230	208/230	208/230
Minimum Circuit Ampacity <sup>2</sup>	12.2	15.3	18.6	22.8	23.4	26.2	30.6
Max. Overcurrent Protection <sup>3</sup>	20	25	30	35	40	45	50
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
<b>UNIT WEIGHTS</b>							
Equipment Weight	171	193	215	222	264	272	309
Shipping Weight	186	213	235	242	284	292	329

<sup>1</sup> Tested and rated in accordance with AHRI Standard 210/240

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Installer will need to supply 3/8" to 1 1/8" adapters for suction line connections.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- Installation of these units requires the specified TXV Kit to be installed on the indoor coil.  
THE SPECIFIED TXV IS DETERMINED BY THE OUTDOOR UNIT NOT THE INDOOR COIL.





IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	23.6	24.0	24.7	25.7	23.4	23.7	24.4	25.5	22.8	23.1	23.8	24.9	21.7	22.1	22.8	23.8	20.4	20.8	21.5	22.5	19.2	19.6	20.3	21.4
	S/T	0.74	0.67	0.53	0.38	0.75	0.67	0.53	0.39	1.00	0.76	0.62	0.48	1.00	0.72	0.58	0.44	1.00	0.74	0.60	0.52	1.00	0.72	0.58	0.51
	Δ T	24	23	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16
	KW	1.29	1.29	1.29	1.30	1.44	1.44	1.44	1.45	1.60	1.61	1.61	1.62	1.78	1.78	1.77	1.78	1.97	1.97	1.97	1.98	2.20	2.20	2.20	2.21
	Amps	5.0	5.0	5.0	5.0	5.6	5.6	5.6	5.7	6.4	6.4	6.4	6.5	7.2	7.2	7.2	7.2	8.1	8.1	8.1	8.1	9.1	9.1	9.1	9.2
	HI PR	235	236	237	241	271	273	274	278	310	311	313	317	352	353	355	359	397	398	400	404	445	446	448	452
	LO PR	125	125	128	133	131	132	135	141	137	139	142	147	143	144	148	153	148	150	153	158	155	157	160	165
	MBh	23.9	24.2	25.0	26.0	24.1	24.4	25.1	26.2	23.1	23.4	24.1	25.2	22.0	22.4	23.1	24.2	20.7	21.1	21.8	22.9	19.6	19.9	20.6	21.7
	S/T	0.80	0.73	0.59	0.44	0.81	0.73	0.60	0.45	1.00	0.76	0.62	0.48	1.00	0.78	0.64	0.50	1.00	0.80	0.66	0.52	1.00	0.78	0.64	0.57
	Δ T	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15
KW	1.30	1.30	1.30	1.31	1.45	1.45	1.44	1.45	1.61	1.61	1.61	1.62	1.78	1.78	1.78	1.79	1.98	1.98	1.98	1.99	2.21	2.21	2.21	2.22	
Amps	5.0	5.0	5.0	5.0	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.2	7.2	7.2	7.3	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	
HI PR	237	238	239	243	273	274	276	280	312	313	315	319	354	355	357	361	399	400	402	406	447	448	450	454	
LO PR	125	127	130	135	133	134	137	143	139	141	144	149	145	146	149	155	150	152	155	160	157	159	162	167	
75	MBh	24.3	24.6	25.3	26.4	24.1	24.4	25.1	26.2	23.5	23.8	24.5	25.6	22.4	22.7	23.4	24.5	21.1	21.4	22.2	23.2	19.9	20.3	21.0	22.0
	S/T	0.84	0.76	0.62	0.48	1.00	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	0.81	0.67	0.53	1.00	0.83	0.70	0.55	1.00	0.75	0.60	0.60
	Δ T	22	20	17	13	22	20	17	13	23	21	17	14	22	20	17	13	22	20	17	13	23	21	18	14
	KW	1.31	1.31	1.30	1.31	1.45	1.45	1.45	1.46	1.62	1.61	1.61	1.62	1.79	1.79	1.79	1.80	1.99	1.99	1.98	2.00	2.22	2.22	2.21	2.23
	Amps	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.5	7.3	7.2	7.2	7.3	8.2	8.1	8.1	8.2	9.2	9.2	9.2	9.2
	HI PR	238	239	241	245	275	276	278	282	314	315	317	321	356	357	359	363	401	402	403	408	449	450	451	456
	LO PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169

IDB: Entering indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)







Table with columns for Outdoor Ambient Temperature (65°F, 75°F, 85°F, 95°F, 105°F, 115°F) and Indoor Wet Bulb Temperature (59°F, 63°F, 67°F, 71°F). Rows include IDB, Airflow, and cooling capacity (kBh, S/T, ΔT, kW, Amps, HI PR, LOPR) for various tonnage ratings (80, 85, 1000, 1125).

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.
Shaded area reflects AHRI Rating Conditions.
kW = Total system power
Amps = Outdoor unit amps (compressor + fan)

IDB	Airflow	Outdoor Ambient Temperature												115°F																																
		65°F						75°F						85°F						95°F						105°F						115°F														
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
70	1050	MBh	35.8	36.3	37.3	-	35.4	35.9	37.0	-	34.5	35.0	36.1	-	32.9	33.4	34.5	-	31.0	31.5	32.5	-	29.2	29.7	30.8	-	31.0	31.5	32.5	-	29.2	29.7	30.8	-	31.0	31.5	32.5	-	29.2	29.7	30.8	-				
		S/T	0.63	0.56	0.43	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	1.00	0.68	0.55	-	0.70	0.63	0.50	-	1.00	0.68	0.55	-	0.70	0.63	0.50	-	1.00	0.68	0.55	-				
		Δ T	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	14	-	19	17	13	-	20	18	14	-	19	17	13	-	20	18	14	-				
	1200	kW	1.93	1.93	1.92	-	2.17	2.17	2.16	-	2.44	2.43	2.43	-	2.72	2.72	2.72	-	3.05	3.04	3.04	-	3.42	3.42	3.42	-	3.05	3.04	3.04	-	3.42	3.42	3.42	-	3.05	3.04	3.04	-	3.42	3.42	3.42	-				
		Amps	7.4	7.4	7.4	-	8.5	8.5	8.5	-	9.7	9.7	9.7	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.3	14.2	14.2	-	11.0	11.0	11.0	-	14.3	14.2	14.2	-	11.0	11.0	11.0	-	14.3	14.2	14.2	-				
		HI PR	245	246	248	-	284	285	286	-	324	325	327	-	367	368	370	-	414	415	417	-	464	465	466	-	367	368	370	-	464	465	466	-	367	368	370	-	464	465	466	-				
	1350	LO PR	117	119	122	-	125	126	129	-	131	132	135	-	136	137	140	-	141	143	146	-	148	149	152	-	131	132	135	-	148	149	152	-	131	132	135	-	148	149	152	-				
MBh		36.4	36.9	37.9	-	36.0	36.5	37.6	-	35.1	35.6	36.7	-	33.5	34.0	35.1	-	31.6	32.1	33.1	-	29.8	30.3	31.4	-	31.6	32.1	33.1	-	29.8	30.3	31.4	-	31.6	32.1	33.1	-	29.8	30.3	31.4	-					
S/T		0.67	0.60	0.47	-	0.68	0.61	0.48	-	0.71	0.63	0.50	-	0.72	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-	0.71	0.63	0.50	-	1.00	0.72	0.59	-	0.71	0.63	0.50	-	1.00	0.72	0.59	-					
75	1050	Δ T	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	17	16	12	-	19	17	13	-	18	16	12	-	19	17	13	-	17	15	11	-	18	16	12	-	19	17	13	-
		kW	1.95	1.95	1.95	-	2.19	2.19	2.19	-	2.46	2.46	2.45	-	2.75	2.74	2.74	-	3.07	3.07	3.06	-	3.45	3.44	3.44	-	2.46	2.46	2.45	-	3.45	3.44	3.44	-	2.46	2.46	2.45	-	3.45	3.44	3.44	-				
		Amps	7.5	7.5	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.6	12.6	12.6	-	14.4	14.3	14.3	-	9.8	9.8	9.8	-	14.4	14.3	14.3	-	9.8	9.8	9.8	-	14.4	14.3	14.3	-				
	1200	HI PR	247	248	250	-	286	287	289	-	326	327	329	-	369	370	372	-	416	417	419	-	466	467	469	-	326	327	329	-	466	467	469	-	326	327	329	-	466	467	469	-				
		LO PR	120	121	124	-	127	128	131	-	133	134	137	-	138	139	142	-	143	145	148	-	150	151	154	-	133	134	137	-	150	151	154	-	133	134	137	-	150	151	154	-				
		MBh	37.1	37.6	38.7	-	36.8	37.3	38.3	-	35.9	36.4	37.4	-	34.3	34.8	35.8	-	32.3	32.8	33.9	-	30.5	31.0	32.1	-	35.9	36.4	37.4	-	30.5	31.0	32.1	-	32.3	32.8	33.9	-	30.5	31.0	32.1	-				
	1350	S/T	0.69	0.61	0.48	-	0.69	0.62	0.49	-	0.72	0.65	0.51	-	0.74	0.66	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	0.69	0.62	0.49	-	1.00	0.74	0.60	-	0.69	0.62	0.49	-	1.00	0.74	0.60	-				
Δ T		17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	11	-	18	16	12	-	17	15	11	-	18	16	12	-	17	15	11	-	18	16	12	-					
kW		1.95	1.95	1.95	-	2.19	2.19	2.19	-	2.46	2.46	2.45	-	2.75	2.74	2.74	-	3.07	3.07	3.06	-	3.45	3.44	3.44	-	2.46	2.46	2.45	-	3.45	3.44	3.44	-	2.46	2.46	2.45	-	3.45	3.44	3.44	-					
75	1050	Amps	7.5	7.5	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.6	12.6	12.6	-	14.4	14.3	14.3	-	9.8	9.8	9.8	-	14.4	14.3	14.3	-	9.8	9.8	9.8	-	14.4	14.3	14.3	-				
		HI PR	245	246	248	252	284	285	287	291	324	325	327	331	367	368	370	374	414	415	417	421	464	465	467	471	324	325	327	331	464	465	467	471	324	325	327	331	464	465	467	471				
		LO PR	118	119	122	127	125	126	129	134	131	132	135	140	136	137	140	145	141	143	146	150	148	149	152	157	131	132	135	140	148	149	152	157	131	132	135	140	148	149	152	157				
	1200	MBh	36.4	36.9	37.9	39.6	36.1	36.6	37.6	39.2	35.1	35.6	36.7	38.3	33.5	34.1	35.1	36.7	31.6	32.1	33.2	34.8	29.8	30.3	31.4	33.0	35.1	35.6	36.7	38.3	29.8	30.3	31.4	33.0	31.6	32.1	33.2	34.8	29.8	30.3	31.4	33.0				
		S/T	0.80	0.73	0.60	0.46	0.81	0.73	0.60	0.46	0.83	0.76	0.63	0.49	1.00	0.78	0.64	0.51	1.00	0.80	0.67	0.53	1.00	0.85	0.72	0.58	0.83	0.76	0.63	0.49	1.00	0.85	0.72	0.58	1.00	0.80	0.67	0.53	1.00	0.85	0.72	0.58				
		Δ T	22	20	17	13	22	20	17	13	22	20	17	13	22	20	17	13	22	20	16	13	23	21	17	14	22	20	17	13	23	21	17	14	22	20	16	13	23	21	17	14				
	1350	kW	1.94	1.94	1.93	1.95	2.18	2.18	2.17	2.19	2.45	2.44	2.46	2.46	2.73	2.73	2.73	2.75	3.06	3.05	3.05	3.07	3.43	3.43	3.45	3.45	2.45	2.44	2.46	2.46	3.43	3.43	3.45	3.45	2.45	2.44	2.46	2.46	3.43	3.43	3.45	3.45				
Amps		7.5	7.5	7.4	7.5	8.6	8.5	8.5	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.1	11.2	12.6	12.6	12.5	12.6	14.3	14.3	14.4	14.4	9.8	9.8	9.7	9.8	14.3	14.3	14.4	14.4	9.8	9.8	9.7	9.8	14.3	14.3	14.4	14.4					
HI PR		248	249	250	255	286	287	289	293	326	327	329	333	370	371	372	377	416	417	419	423	466	467	469	473	326	327	329	333	466	467	469	473	326	327	329	333	466	467	469	473					
1350	LO PR	120	121	124	129	127	128	131	136	133	134	137	142	138	139	142	147	143	145	148	153	150	151	154	159	133	134	137	142	150	151	154	159	143	145	148	153	150	151	154	159					
	MBh	37.1	37.6	38.7	40.3	36.8	37.3	38.4	40.0	35.9	36.4	37.4	39.1	34.3	34.8	35.8	37.5	32.3	32.8	33.9	35.5	30.6	31.1	32.1	33.7	35.9	36.4	37.4	39.1	30.6	31.1	32.1	33.7	32.3	32.8	33.9	35.5	30.6	31.1	32.1	33.7					
	S/T	0.81	0.74	0.61	0.47	0.82	0.75	0.61	0.48	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	0.81	0.68	0.54	1.00	0.86	0.73	0.59	0.77	0.64	0.50	1.00	0.86	0.73	0.59	0.59	1.00	0.81	0.68	0.54	1.00	0.86	0.73	0.59					
1350	Δ T	21	19	16	12	21	19	16	12	21	19	16	12	21	19	16	12	21	19	15	12	22	20	17	13	21	19	16	12	22	20	17	13	21	19	15	12	22	20	17	13					
	kW	1.95	1.95	1.94	1.96	2.19	2.19	2.18	2.20	2.46	2.45	2.45	2.47	2.74	2.74	2.74	2.76	3.07	3.06	3.06	3.08	3.44	3.44	3.46	3.46	2.46	2.45	2.45	2.47	3.44	3.44	3.46	3.46	2.46	2.45	2.45	2.47	3.44	3.44	3.46	3.46					
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.4	14.4	9.8	9.8	9.8	9.9	14.3	14.3	14.4	14.4	9.8	9.8	9.8	9.9	14.3	14.3	14.4	14.4					
1350	HI PR	250	251	253	257	288	289	291	295	329	330	331	336	372	373	375	379	419	420	421	426	468	470	471	475	329	330	331	336	468	470	471	475	329	330	331	336	468	470	471	475					
	LO PR	122	123	126	131	129	130	133	138	135	137	140	145	140	142	145	150	146	147	150	155	152	153	156	161	135	137	140	145	152	153	156	161	146	147	150	155	152	153	156	161					

		Outdoor Ambient Temperature																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		Airflow			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature			Wet Bulb Temperature					
<b>80</b>	<b>1050</b>	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
		S/T	0.88	0.81	0.68	0.54	1.00	0.84	0.71	0.57	1.00	0.86	0.72	0.59	1.00	0.88	0.75	0.61	1.00	0.90	0.77	0.63	1.00	0.92	0.79	0.65	1.00	0.88	0.75	0.61	1.00	0.80	0.80	0.66			
	Δ T	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	18	27	25	22	19				
	kW	1.93	1.93	1.92	1.94	2.17	2.17	2.16	2.18	2.44	2.43	2.43	2.45	2.72	2.72	2.72	2.74	3.05	3.04	3.04	3.06	3.42	3.42	3.42	3.44	3.42	3.42	3.42	3.44	3.42	3.42	3.42	3.44				
	Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.5	14.3	14.2	14.2	14.3	14.3	14.2	14.2	14.3	14.3	14.2	14.2	14.3				
	HI PR	246	247	249	253	284	285	287	291	324	326	327	331	368	369	371	375	415	416	417	422	464	465	467	471	464	465	467	471	464	465	467	471				
	LO PR	118	119	122	127	125	127	129	134	131	133	136	141	137	138	141	146	142	143	146	151	148	150	152	157	148	150	152	157	148	150	152	157				
	MBh	36.6	37.1	38.1	39.7	36.2	36.7	37.8	39.4	35.3	35.8	36.9	38.5	33.7	34.2	35.3	36.9	31.8	32.3	33.3	35.0	30.0	30.5	31.6	33.2	30.0	30.5	31.6	33.2	30.0	30.5	31.6	33.2				
	S/T	0.92	0.85	0.72	0.58	1.00	0.85	0.72	0.58	1.00	0.88	0.75	0.61	1.00	0.90	0.77	0.63	1.00	0.92	0.79	0.65	1.00	0.88	0.75	0.61	1.00	0.80	0.80	0.66	1.00	0.80	0.80	0.66				
	Δ T	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18	27	25	21	18	27	25	21	18				
kW	1.94	1.94	1.94	1.95	2.18	2.18	2.17	2.19	2.45	2.45	2.44	2.46	2.74	2.73	2.73	2.75	3.06	3.06	3.05	3.07	3.44	3.43	3.43	3.45	3.44	3.43	3.43	3.45	3.44	3.43	3.43	3.45					
Amps	7.5	7.5	7.4	7.5	8.6	8.6	8.5	8.6	9.8	9.8	9.8	9.8	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.6	14.3	14.3	14.3	14.4	14.3	14.3	14.3	14.4	14.3	14.3	14.3	14.4					
HI PR	248	249	251	255	286	287	289	293	327	328	329	334	370	371	373	377	417	418	420	424	467	468	469	474	467	468	469	474	467	468	469	474					
LO PR	120	122	124	129	127	129	132	136	133	135	138	143	139	140	143	148	144	145	148	153	150	152	155	159	150	152	155	159	150	152	155	159					
MBh	37.3	37.8	38.9	40.5	37.0	37.5	38.5	40.2	36.1	36.6	37.6	39.2	34.5	35.0	36.0	37.6	32.5	33.0	34.1	35.7	30.8	31.3	32.3	33.9	30.8	31.3	32.3	33.9	30.8	31.3	32.3	33.9					
S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.62	1.00	0.91	0.78	0.64	1.00	0.93	0.80	0.66	1.00	0.80	0.80	0.66	1.00	0.80	0.80	0.66	1.00	0.80	0.80	0.66					
Δ T	25	23	20	16	25	23	20	16	25	23	20	16	25	23	20	16	25	23	19	16	26	24	21	17	26	24	21	17	26	24	21	17					
kW	1.95	1.95	1.95	1.96	2.19	2.19	2.18	2.20	2.46	2.46	2.45	2.47	2.75	2.74	2.74	2.76	3.07	3.07	3.06	3.08	3.45	3.44	3.44	3.46	3.45	3.44	3.44	3.46	3.45	3.44	3.44	3.46					
Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.4	14.3	14.3	14.4	14.4	14.3	14.3	14.4	14.4	14.3	14.3	14.4					
HI PR	250	251	253	257	289	290	291	296	329	330	332	336	372	373	375	379	419	420	422	426	469	470	472	476	469	470	472	476	469	470	472	476					
LO PR	122	124	127	132	130	131	134	139	136	137	140	145	141	142	145	150	146	148	150	155	153	154	157	162	153	154	157	162	153	154	157	162					
<b>85</b>	<b>1050</b>	MBh	36.6	37.1	38.1	39.7	36.2	36.7	37.8	39.4	35.3	35.8	36.9	38.5	33.7	34.2	35.3	36.9	31.8	32.3	33.3	35.0	30.0	30.5	31.6	33.2	30.0	30.5	31.6	33.2							
		S/T	1.00	0.90	0.77	0.6	1.00	0.91	0.78	0.6	1.00	0.94	0.80	0.7	1.00	0.86	0.72	0.59	1.00	0.88	0.75	0.61	1.00	0.80	0.80	0.66	1.00	0.80	0.80	0.66							
	Δ T	31	29	25	22	30	29	25	22	31	29	25	22	30	29	25	22	30	28	25	21	31	30	26	23	31	30	26	23								
	kW	1.93	1.93	1.93	1.9	2.17	2.17	2.17	2.2	2.44	2.44	2.43	2.5	2.73	2.73	2.72	2.7	3.05	3.05	3.04	3.1	3.43	3.43	3.42	3.4	3.43	3.43	3.42	3.4								
	Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.3	14.3	14.3	14.2	14.3	14.3	14.2	14.2								
	HI PR	247	248	250	254	285	286	288	292	326	327	328	333	369	370	372	376	416	417	418	423	466	467	468	473	466	467	468	473								
	LO PR	120	121	124	129	127	128	131	136	133	134	137	142	138	140	143	148	143	145	148	153	150	151	154	159	150	151	154	159								
	MBh	37.2	37.7	38.7	40.3	36.8	37.3	38.4	40.0	35.9	36.4	37.5	39.1	34.3	34.8	35.9	37.5	32.4	32.9	33.9	35.6	30.6	31.1	32.2	33.8	30.6	31.1	32.2	33.8								
	S/T	1.00	0.95	0.81	0.7	1.00	0.95	0.82	0.7	1.00	0.97	0.84	0.7	1.00	0.90	0.76	0.62	1.00	0.92	0.79	0.65	1.00	0.80	0.80	0.66	1.00	0.80	0.80	0.66								
	Δ T	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	22	30	28	25	22								
kW	1.95	1.94	1.94	2.0	2.19	2.18	2.18	2.2	2.45	2.45	2.45	2.5	2.74	2.74	2.73	2.8	3.06	3.06	3.06	3.1	3.44	3.44	3.43	3.5	3.44	3.44	3.43	3.5									
Amps	7.5	7.5	7.5	7.5	8.6	8.6	8.6	8.6	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4	14.3	14.3	14.3	14.4									
HI PR	249	250	252	256	288	289	290	295	328	329	331	335	371	372	374	378	418	419	421	425	468	469	471	475	468	469	471	475									
LO PR	122	123	126	131	129	130	133	138	135	137	139	144	140	142	145	150	145	147	150	155	152	153	156	161	152	153	156	161									
MBh	37.9	38.4	39.5	41.1	37.6	38.1	39.1	40.8	36.7	37.2	38.2	39.8	35.1	35.6	36.6	38.2	33.1	33.6	34.7	36.3	31.3	31.8	32.9	34.5	31.3	31.8	32.9	34.5									
S/T	1.00	0.96	0.83	0.7	1.00	0.97	0.83	0.7	1.00	0.99	0.86	0.7	1.00	0.90	0.76	0.62	1.00	0.92	0.79	0.65	1.00	0.80	0.80	0.66	1.00	0.80	0.80	0.66									
Δ T	29	27	23	20	28	27	23	20	29	27	24	20	28	27	23	20	28	26	23	19	29	28	24	21	29	28	24	21									
kW	1.96	1.95	1.95	2.0	2.20	2.19	2.19	2.2	2.46	2.46	2.46	2.5	2.75	2.75	2.74	2.8	3.07	3.07	3.07	3.1	3.45	3.45	3.44	3.5	3.45	3.45	3.44	3.5									
Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.4	14.4	14.3	14.4	14.4	14.4	14.3	14.4									
HI PR	251	252	254	258	290	291	293	297	330	331	333	337	373	375	376	380	420	421	423	427	470	471	473	477	470	471	473	477									
LO PR	124	126	129	134	131	133	136	141	137	139	142	147	143	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164									

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE																													
		65°F					75°F					85°F					95°F					105°F					115°F				
		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71	
ENTERING INDOOR WET BULB TEMPERATURE																															
AIRFLOW		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71		59	63	67	71	
70	MBh	40.9	41.4	42.6	-		40.5	41.1	42.3	-		39.4	40.0	41.2	-		37.6	38.2	39.4	-		35.4	35.9	37.2	-		33.3	33.9	35.1	-	
	S/T	0.63	0.56	0.42	-		0.64	0.56	0.43	-		0.66	0.59	0.45	-		0.68	0.61	0.47	-		1.00	0.63	0.49	-		1.00	0.68	0.54	-	
	Δ T	19	17	14	-		19	17	14	-		19	17	14	-		19	17	14	-		18	17	13	-		19	18	14	-	
	1225 kW	2.25	2.24	2.24	-		2.50	2.50	2.49	-		2.78	2.78	2.77	-		3.09	3.08	3.08	-		3.43	3.43	3.42	-		3.83	3.83	3.82	-	
	Amps	8.2	8.2	8.2	-		9.4	9.4	9.4	-		10.7	10.7	10.6	-		12.1	12.1	12.0	-		13.6	13.6	13.6	-		15.5	15.4	15.4	-	
	HI PR	240	241	243	-		278	279	281	-		318	319	321	-		361	362	363	-		407	408	409	-		456	457	458	-	
	LO PR	120	121	124	-		127	129	132	-		134	135	138	-		139	140	143	-		144	146	149	-		151	152	155	-	
	MBh	41.2	41.8	43.0	-		40.9	41.4	42.7	-		39.8	40.4	41.6	-		38.0	38.5	39.8	-		35.7	36.3	37.5	-		33.7	34.3	35.5	-	
	S/T	0.67	0.59	0.46	-		0.68	0.60	0.46	-		0.70	0.63	0.49	-		0.72	0.64	0.51	-		1.00	0.67	0.53	-		1.00	0.72	0.58	-	
	Δ T	18	16	13	-		18	16	13	-		18	16	13	-		18	16	13	-		18	16	13	-		19	17	14	-	
	1340 kW	2.26	2.25	2.25	-		2.51	2.51	2.50	-		2.79	2.79	2.78	-		3.10	3.09	3.09	-		3.44	3.43	3.43	-		3.84	3.83	3.83	-	
	Amps	8.3	8.2	8.2	-		9.4	9.4	9.4	-		10.7	10.7	10.7	-		12.1	12.1	12.1	-		13.7	13.7	13.6	-		15.5	15.5	15.5	-	
	HI PR	242	243	245	-		280	281	282	-		319	320	322	-		362	363	365	-		408	409	411	-		457	458	460	-	
	LO PR	121	123	126	-		128	130	133	-		135	136	139	-		140	142	145	-		145	147	150	-		152	154	157	-	
	MBh	42.2	42.7	44.0	-		41.8	42.4	43.6	-		40.7	41.3	42.5	-		38.9	39.5	40.7	-		36.7	37.3	38.5	-		34.6	35.2	36.4	-	
S/T	0.71	0.63	0.50	-		0.72	0.64	0.50	-		0.74	0.67	0.53	-		0.76	0.69	0.55	-		1.00	0.71	0.57	-		1.00	0.76	0.62	-		
Δ T	17	15	12	-		17	15	12	-		17	15	12	-		17	15	12	-		16	15	11	-		18	16	12	-		
1575 kW	2.27	2.27	2.26	-		2.52	2.52	2.52	-		2.81	2.80	2.80	-		3.11	3.11	3.10	-		3.45	3.45	3.45	-		3.85	3.85	3.85	-		
Amps	8.3	8.3	8.3	-		9.5	9.5	9.5	-		10.8	10.8	10.7	-		12.2	12.2	12.1	-		13.7	13.7	13.7	-		15.6	15.6	15.5	-		
HI PR	245	246	247	-		282	283	285	-		322	323	325	-		365	366	368	-		411	412	414	-		460	461	463	-		
LO PR	124	125	128	-		131	133	136	-		138	139	142	-		143	144	148	-		148	150	153	-		155	156	159	-		

Shaded area reflects ACCA (TVA) Rating Conditions.  
 IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																							
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	MBh	41.1	41.7	42.9	44.7	40.7	41.3	42.5	44.4	39.7	40.2	41.5	43.3	37.8	38.4	39.6	41.5	35.6	36.2	37.4	39.2	33.6	34.1	35.3	37.2	33.6	34.1	35.3	37.2	33.6	34.1	35.3	37.2				
	S/T	0.89	0.81	0.67	0.53	1.00	0.82	0.68	0.54	1.00	0.84	0.71	0.56	1.00	0.86	0.73	0.58	1.00	0.80	0.67	0.51	1.00	0.88	0.75	0.60	1.00	0.82	0.68	0.54	1.00	0.86	0.73	0.58				
	Δ T	26	25	21	18	26	25	21	18	27	25	22	18	26	25	21	18	26	24	21	17	26	25	21	17	26	25	21	17	26	25	21	18				
	KW	2.25	2.24	2.24	2.26	2.50	2.50	2.49	2.51	2.78	2.78	2.77	2.79	3.09	3.08	3.08	3.10	3.43	3.43	3.43	3.42	3.83	3.83	3.83	3.82	3.83	3.83	3.83	3.82	3.84	3.83	3.83	3.84				
	Amps	8.2	8.2	8.2	8.3	9.4	9.4	9.3	9.4	10.7	10.7	10.6	10.7	12.1	12.1	12.0	12.1	13.6	13.6	13.6	13.6	15.5	15.4	15.4	15.5	15.5	15.4	15.4	15.5	15.5	15.4	15.5					
	HI PR	241	242	244	248	279	280	282	286	319	320	321	325	361	362	364	368	407	408	410	414	456	457	459	463	456	457	459	463	456	457	459	463				
	LO PR	121	122	125	130	128	129	132	137	134	136	139	144	140	141	144	149	145	146	149	154	151	153	156	161	151	153	156	161	151	153	156	161				
	MBh	41.5	42.0	43.3	45.1	41.1	41.7	42.9	44.7	40.0	40.6	41.8	43.7	38.2	38.8	40.0	41.9	36.0	36.5	37.8	39.6	33.9	34.5	35.7	37.6	33.9	34.5	35.7	37.6	33.9	34.5	35.7	37.6				
	S/T	0.93	0.85	0.71	0.57	1.00	0.86	0.72	0.58	1.00	0.88	0.74	0.60	1.00	0.90	0.76	0.62	1.00	0.80	0.67	0.51	1.00	0.88	0.75	0.60	1.00	0.82	0.68	0.54	1.00	0.86	0.73	0.58				
	Δ T	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	26	25	21	17	26	25	21	17	26	25	21	18				
	KW	2.25	2.25	2.25	2.27	2.51	2.51	2.50	2.52	2.79	2.79	2.78	2.80	3.10	3.09	3.09	3.11	3.44	3.43	3.43	3.43	3.84	3.83	3.83	3.83	3.85	3.84	3.83	3.83	3.85	3.83	3.83	3.85				
	Amps	8.3	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.1	12.1	12.1	12.2	13.7	13.7	13.6	13.7	15.5	15.5	15.5	15.6	15.5	15.5	15.5	15.5	15.5	15.5	15.6	15.6				
HI PR	242	244	245	249	280	281	283	287	320	321	323	327	363	364	365	370	409	410	411	416	458	459	461	465	458	459	461	465	458	459	461	465					
LO PR	122	123	126	131	129	130	134	139	135	137	140	145	141	142	145	150	146	147	151	156	153	154	157	162	153	154	157	162	153	154	157	162					
MBh	42.4	43.0	44.2	46.0	42.0	42.6	43.8	45.7	41.0	41.5	42.8	44.6	39.1	39.7	40.9	42.8	36.9	37.5	38.7	40.6	34.9	35.4	36.7	38.5	34.9	35.4	36.7	38.5	34.9	35.4	36.7	38.5					
S/T	1.00	0.89	0.75	0.61	1.00	0.90	0.76	0.62	1.00	0.92	0.79	0.64	1.00	0.94	0.81	0.66	1.00	0.80	0.67	0.51	1.00	0.88	0.75	0.60	1.00	0.82	0.68	0.54	1.00	0.86	0.73	0.58					
Δ T	24	23	19	16	24	23	19	16	25	23	20	16	24	23	19	16	24	22	19	16	25	24	20	17	24	22	19	16	25	24	20	17					
KW	2.27	2.27	2.26	2.28	2.52	2.52	2.52	2.54	2.80	2.80	2.80	2.82	3.11	3.11	3.10	3.12	3.45	3.45	3.44	3.46	3.85	3.85	3.85	3.86	3.85	3.85	3.85	3.85	3.85	3.85	3.86	3.86					
Amps	8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.5	10.8	10.8	10.7	10.8	12.2	12.2	12.1	12.2	13.7	13.7	13.7	13.7	15.6	15.6	15.5	15.6	15.6	15.6	15.5	15.5	15.5	15.6	15.6	15.6					
HI PR	245	246	248	252	283	284	286	290	323	324	325	330	365	366	368	372	411	412	414	418	461	462	463	467	461	462	463	467	461	462	463	467					
LO PR	125	126	129	134	132	133	136	141	138	140	143	148	144	145	148	153	149	150	153	158	155	157	160	165	155	157	160	165	155	157	160	165					

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE																							
		65°F						75°F						85°F						95°F						105°F						115°F					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
85	MBh	41.8	42.3	43.6	45.4	41.4	42.0	43.2	45.1	40.3	40.9	42.1	44.0	38.5	39.1	40.3	42.2	36.3	36.9	38.1	39.9	34.2	34.8	36.0	37.9	34.2	34.8	36.0	37.9	34.2	34.8	36.0	37.9				
	S/T	1.00	0.91	0.78	0.6	1.00	0.92	0.78	0.6	1.00	0.94	0.81	0.7	1.00	0.96	0.83	0.7	1.00	0.80	0.67	0.51	1.00	0.88	0.75	0.60	1.00	0.82	0.68	0.54	1.00	0.86	0.73	0.58				
	Δ T	30	28	25	21	30	28	25	21	30	28	25	22	30	28	25	21	30	28	25	21	31	29	26	22	31	29	26	22	31	29	26	22				
	KW	2.25	2.25	2.24	2.3	2.50	2.50	2.50	2.5	2.79	2.78	2.78	2.8	3.09	3.09	3.08	3.1	3.43	3.43	3.43	3.4	3.83	3.83	3.83	3.8	3.83	3.83	3.83	3.83	3.83	3.83	3.83	3.8				
	Amps	8.2	8.2	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.1	13.6	13.6	13.6	13.7	15.5	15.5	15.4	15.5	15.5	15.4	15.4	15.5	15.5	15.4	15.5					
	HI PR	242	243	245	249	280	281	283	287	320	321	322	327	362	363	365	369	408	409	411	415	458	459	460	464	458	459	460	464	458	459	460	464				
	LO PR	122	124	127	132	130	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163	153	155	158	163	153	155	158	163				
	MBh	42.2	42.7	43.9	45.8	41.8	42.4	43.6	45.4	40.7	41.3	42.5	44.4	38.9	39.5	40.7	42.5	36.7	37.2	38.5	40.3	34.6	35.2	36.4	38.3	34.6	35.2	36.4	38.3	34.6	35.2	36.4	38.3				
	S/T	1.00	0.95	0.82	0.7	1.00	0.96	0.82	0.7	1.00	0.98	0.85	0.7	1.00	1.00	0.87	0.7	1.00	0.80	0.67	0.51	1.00	0.88	0.75	0.60	1.00	0.82	0.68	0.54	1.00	0.86	0.73	0.58				
	Δ T	29	27	24	21	29	27	24	21	29	28	24	21	29	27	24	21	29	27	24	21	30	28	25	22	29	27	24	21	30	28	25	22				
	KW	2.26	2.26	2.25	2.3	2.51	2.51	2.51	2.5	2.79	2.79	2.79	2.8	3.10	3.10	3.09	3.1	3.44	3.44	3.44	3.5	3.84	3.84	3.83	3.9	3.84	3.84	3.83	3.9	3.84	3.84	3.83	3.9				
	Amps	8.3	8.3	8.2	8.3	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.1	12.1	12.1	12.2	13.7	13.7	13.7	13.7	15.5	15.5	15.5	15.6	15.5	15.5	15.5	15.5	15.5	15.5	15.6	15.6				
HI PR	244	245	246	251	281	282	284	288	321	322	324	328	364	365	366	371	410	411	413	417	459	460	462	466	459	460	462	466	459	460	462	466					
LO PR	124	125	128	133	131	132	135	140	137	139	142	147	143	144	147	152	148	149	152	157	154	156	159	164	154	156	159	164	154	156	159	164					
MBh	43.1	43.7	44.9	46.7	42.7	43.3	44.5	46.4	41.7	42.2	43.4	45.3	39.8	40.4	41.6	43.5	37.6	38.2	39.4	41.2	35.6	36.1	37.3	39.2	35.6	36.1	37.3	39.2	35.6	36.1	37.3	39.2					
S/T	1.00	0.99	0.86	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.89	0.7	1.00	1.00	0.91	0.8	1.00	0.80	0.67	0.51	1.00	0.88	0.75	0.60	1.00	0.82	0.68	0.54	1.00	0.86	0.73	0.58					
Δ T	28	26	23	19	28	26	23	19	28	26	23	20	28	26	23	19	28	26	23	19	29	27	24	20	29	27	24	20	29	27	24	20					
KW	2.27	2.27	2.27	2.3	2.53	2.53	2.52	2.5	2.81	2.81	2.80	2.8	3.11	3.11	3.11	3.1	3.46	3.45	3.45	3.5	3.86	3.85	3.85	3.9	3.86	3.85	3.85	3.9	3.86	3.85	3.85	3.9					
Amps	8.3	8.3	8.3	8.4	9.5	9.5	9.5	9.6	10.8	10.8	10.8	10.9	12.2	12.2	12.2	12.3	13.8	13.7	13.7	13.7	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6	15.6					
HI PR	246	247	249	253	284	285	287	291	324	325	3																										

		OUTDOOR AMBIENT TEMPERATURE																																																																												
		65°F							75°F							85°F							95°F							105°F							115°F																																									
		IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																															
70	1400	MBh	46.9	47.5	48.9	-	46.4	47.1	48.5	-	45.2	45.9	47.3	-	43.2	43.8	45.2	-	40.6	41.3	42.7	-	38.3	39.0	40.3	-	46.9	47.5	48.9	-	46.4	47.1	48.5	-	45.2	45.9	47.3	-	43.2	43.8	45.2	-	40.6	41.3	42.7	-	38.3	39.0	40.3	-	46.9	47.5	48.9	-	46.4	47.1	48.5	-	45.2	45.9	47.3	-	43.2	43.8	45.2	-	40.6	41.3	42.7	-	38.3	39.0	40.3	-				
		S/T	0.65	0.57	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.62	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.65	0.51	-	0.65	0.57	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.62	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	0.65	0.57	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.62	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-
		Δ T	19	17	13	-	18	17	13	-	19	17	14	-	18	17	13	-	18	16	13	-	17	16	13	-	19	18	14	-	19	17	13	-	18	17	13	-	19	17	14	-	18	16	13	-	17	16	13	-	19	18	14	-	19	17	13	-	18	17	13	-	19	17	14	-	18	16	13	-	17	16	13	-	19	18	14	-
	1600	KW	2.52	2.52	2.51	-	2.81	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-	3.89	3.89	3.88	-	4.35	4.35	4.35	-	4.35	4.35	4.35	-	2.52	2.52	2.51	-	2.81	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-	3.89	3.89	3.88	-	4.35	4.35	4.35	-	2.52	2.52	2.51	-	2.81	2.81	2.81	-	3.14	3.14	3.13	-	3.50	3.49	3.49	-	3.89	3.89	3.88	-	4.35	4.35	4.35	-
		Amps	9.4	9.3	9.3	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.8	13.8	13.8	-	15.6	15.6	15.6	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-	9.4	9.3	9.3	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.8	13.8	13.8	-	15.6	15.6	15.6	-	17.7	17.7	17.7	-	9.4	9.3	9.3	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.8	13.8	13.8	-	15.6	15.6	15.6	-	17.7	17.7	17.7	-
		HI PR	244	245	247	-	282	283	285	-	322	323	325	-	365	366	368	-	412	413	414	-	461	462	464	-	461	462	464	-	244	245	247	-	282	283	285	-	322	323	325	-	365	366	368	-	412	413	414	-	461	462	464	-	244	245	247	-	282	283	285	-	322	323	325	-	365	366	368	-	412	413	414	-	461	462	464	-
	LO PR	124	122	125	-	128	129	132	-	134	136	139	-	139	141	144	-	145	146	149	-	151	153	156	-	151	153	156	-	124	122	125	-	128	129	132	-	134	136	139	-	139	141	144	-	145	146	149	-	151	153	156	-	124	122	125	-	128	129	132	-	134	136	139	-	139	141	144	-	145	146	149	-	151	153	156	-	
	1800	MBh	48.4	49.0	50.4	-	48.0	48.6	50.0	-	46.8	47.4	48.8	-	44.7	45.3	46.7	-	42.1	42.8	44.2	-	39.8	40.5	41.8	-	39.8	40.5	41.8	-	48.4	49.0	50.4	-	48.0	48.6	50.0	-	46.8	47.4	48.8	-	44.7	45.3	46.7	-	42.1	42.8	44.2	-	39.8	40.5	41.8	-	48.4	49.0	50.4	-	48.0	48.6	50.0	-	46.8	47.4	48.8	-	44.7	45.3	46.7	-	42.1	42.8	44.2	-	39.8	40.5	41.8	-
		S/T	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	1.00	0.69	0.56	-	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-
		Δ T	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	18	16	12	-	18	16	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	18	16	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	17	15	12	-	18	16	12	-

		OUTDOOR AMBIENT TEMPERATURE																																																																														
		65°F							75°F							85°F							95°F							105°F							115°F																																											
		IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																																																	
75	1400	MBh	46.9	47.5	48.9	51.0	46.5	47.1	48.5	50.6	45.3	45.9	47.3	49.4	43.2	43.8	45.2	47.3	40.6	41.3	42.7	44.8	38.3	39.0	40.4	42.5	46.9	47.5	48.9	51.0	46.5	47.1	48.5	50.6	45.3	45.9	47.3	49.4	43.2	43.8	45.2	47.3	40.6	41.3	42.7	44.8	38.3	39.0	40.4	42.5	46.9	47.5	48.9	51.0	46.5	47.1	48.5	50.6	45.3	45.9	47.3	49.4	43.2	43.8	45.2	47.3	40.6	41.3	42.7	44.8	38.3	39.0	40.4	42.5						
		S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.57	0.43	0.46	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.82	0.69	0.55	1.00	0.78	0.70	0.57	0.43	0.78	0.71	0.57	0.43	0.46	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.82	0.69	0.55	1.00	0.78	0.70	0.57	0.43	0.78	0.71	0.57	0.43	0.46	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.82	0.69	0.55	1.00
		Δ T	23	21	17	14	22	21	17	14	13	23	21	18	14	22	21	17	14	22	20	17	14	23	22	18	15	15	23	21	17	14	22	21	17	14	13	23	21	18	14	22	21	17	14	22	20	17	14	23	22	18	15	15	23	21	17	14	22	21	17	14	13	23	21	18	14	22	21	17	14	22	20	17	14	23	22	18	15	15
	1600	KW	2.53	2.53	2.52	2.54	2.82	2.82	2.82	2.84	3.15	3.15	3.14	3.17	3.50	3.49	3.49	3.51	3.90	3.89	3.88	3.90	4.36	4.36	4.36	4.38	2.53	2.53	2.52	2.54	2.82	2.82	2.82	2.84	3.15	3.15	3.14	3.17	3.50	3.49	3.49	3.51	3.90	3.89	3.88	3.90	4.36	4.36	4.36	4.38	2.53	2.53	2.52	2.54	2.82	2.82	2.82	2.84	3.15	3.15	3.14	3.17	3.50	3.49	3.49	3.51	3.90	3.89	3.88	3.90	4.36	4.36	4.36	4.38						
		Amps	9.3	9.3	9.3	9.4	10.7	10.7	10.6	10.8	12.2	12.2	12.1	12.2	13.8	13.8	13.8	13.9	15.6	15.6	15.6	15.7	17.8	17.8	17.8	17.8	9.3	9.3	9.3	9.4	10.7	10.7	10.6	10.8	12.2	12.2	12.1	12.2	13.8	13.8	13.9	15.6	15.6	15.6	15.7	17.8	17.8	17.8	17.8	9.3	9.3	9.3	9.4	10.7	10.7	10.6	10.8	12.2	12.2	12.1	12.2	13.8	13.8	13.9	15.6	15.6	15.6	15.7	17.8	17.8	17.8	17.8								
		HI PR	244	245	247	251	282	283	285	289	322	323	325	329	365	366	368	372	412	413	414	419	461	462	464	468	244	245	247	251	282	283	285	289	322	323	325	329	365	366	368	372	412	413	414	419	461	462	464	468	244	245	247	251	282	283	285	289	322	323	325	329	365	366	368	372	412	413	414	419	461	462	464	468						
	LO PR	121	122	125	130	128	129	132	137	134	136	139	144	144	141	141	144	149	145	146	148	151	153	156	161	121	122	125	130	128	129	132	137	134	136	139	144	144	141	141	144	149	145	146	148	151	153	156	161	121	122	125	130	128	129	132	137	134	136	139	144	144	141	141	144	149	145	146	148	151	153	156	161							
	1800	MBh	47.5	48.1	49.5	51.6	47.1	47.7	49.1	51.2	45.9	46.5	47.9	50.0	43.8	44.4	45.8	47.9	41.2	41.9	43.3	45.4	38.9	39.6	40.9	43.1	47.5	48.1	49.5	51.6	47.1	47.7	49.1	51.2	45.9	46.5	47.9	50.0	43.8	44.4	45.8	47.9	41.2	41.9	43.3	45.4	38.9	39.6	40.9	43.1	47.5	48.1	49.5	51.6	47.1	47.7	49.1	51.2	45.9	46.5	47.9	50.0	43.8	44.4	45.8	47.9	41.2	41.9	43.3	45.4	38.9	39.6	40.9	43.1						
		S/T	0.81	0.73	0.60	0.46	0.81	0.74	0.60	0.46	0.46	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.51	1.00	0.80	0.67	0.53	1.00	0.85	0.72	0.58	1.00	0.81	0.73	0.60	0.46	0.81	0.74	0.60	0.46	0.46	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.51	1.00	0.80	0.67	0.53	1.00	0.85	0.72	0.58	1.00	0.81	0.73																								

		OUTDOOR AMBIENT TEMPERATURE												95°F												105°F												115°F																												
		65°F						75°F						85°F						ENTERING INDOOR WET BULB TEMPERATURE						95°F						105°F						115°F																												
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75																									
80	MBh	47.1	47.8	49.2	51.3	53.8	46.7	47.4	48.8	50.9	53.4	45.5	46.2	47.5	49.7	52.2	43.4	44.1	45.5	47.6	50.1	40.9	41.5	42.9	45.0	47.5	38.6	39.2	40.6	42.7	45.2	36.1	36.7	38.1	40.2	42.3	33.6	34.2	35.6	37.7	39.8	31.1	31.7	33.1	35.2	37.3	28.6	29.2	30.6	32.7	34.8															
	S/T	0.90	0.82	0.69	0.55	0.42	1.00	0.83	0.70	0.56	0.43	1.00	0.85	0.72	0.58	0.45	1.00	0.87	0.74	0.60	0.47	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00										
	ΔT	27	25	21	18	15	26	25	21	18	15	27	25	22	18	15	26	25	21	18	15	26	24	21	18	15	26	24	21	18	15	26	24	21	18	15	26	24	21	18	15	26	24	21	18	15	26	24	21	18	15	26	24	21	18	15	26	24	21	18	15					
	kW	2.52	2.52	2.51	2.54	2.58	2.81	2.81	2.81	2.83	2.87	3.14	3.14	3.13	3.16	3.20	3.49	3.49	3.49	3.51	3.54	3.89	3.89	3.89	3.88	3.91	4.35	4.35	4.35	4.35	4.37	4.81	4.81	4.81	4.81	4.81	5.27	5.27	5.27	5.27	5.27	5.73	5.73	5.73	5.73	5.73	6.19	6.19	6.19	6.19	6.19	6.65	6.65	6.65	6.65	6.65										
	Amps	9.3	9.3	9.3	9.4	9.5	10.7	10.7	10.7	10.8	10.9	12.2	12.2	12.2	12.3	12.4	13.8	13.8	13.8	13.9	14.0	15.6	15.6	15.6	15.6	15.7	17.7	17.7	17.7	17.7	17.8	19.8	19.8	19.8	19.8	19.8	21.9	21.9	21.9	21.9	21.9	24.0	24.0	24.0	24.0	24.0	26.1	26.1	26.1	26.1	26.1	28.2	28.2	28.2	28.2	28.2										
	HI PR	245	246	247	251	255	283	284	285	290	294	323	324	325	330	334	366	367	368	373	377	412	413	414	415	419	462	463	464	466	469	512	513	514	516	519	562	563	564	566	569	612	613	614	616	619	662	663	664	666	669															
	LO PR	121	123	124	127	131	128	130	133	138	142	135	136	139	144	148	140	141	144	150	155	145	147	151	156	160	152	153	156	161	165	157	159	163	168	172	162	164	168	173	177	167	169	173	178	182	172	174	178	183	187	177	179	183	188	192										
	MBh	47.7	48.4	49.8	51.9	54.4	47.3	48.0	49.3	51.4	53.9	46.1	46.7	48.1	50.2	52.7	44.0	44.7	46.0	48.2	50.7	41.5	42.1	43.5	45.6	48.1	39.1	39.8	41.2	43.3	45.8	36.6	37.3	38.7	40.8	42.9	34.1	34.8	36.2	38.3	40.4	31.6	32.3	33.7	35.8	37.9	29.1	29.8	31.2	33.3	35.4	26.6	27.3	28.7	30.8	32.9	24.1	24.8	26.2	28.3	30.4	21.6	22.3	23.7	25.8	27.9
	S/T	1.00	0.85	0.72	0.58	0.45	1.00	0.86	0.73	0.59	0.46	1.00	0.88	0.75	0.61	0.48	1.00	0.90	0.77	0.63	0.50	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00										
	ΔT	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14	26	24	21	17	14										
	kW	2.53	2.53	2.52	2.55	2.59	2.82	2.82	2.82	2.84	2.88	3.15	3.15	3.14	3.17	3.21	3.51	3.50	3.50	3.52	3.56	3.90	3.90	3.90	3.89	3.92	4.37	4.37	4.37	4.37	4.39	4.83	4.83	4.83	4.83	4.83	5.29	5.29	5.29	5.29	5.29	5.75	5.75	5.75	5.75	5.75	6.21	6.21	6.21	6.21	6.21															
	Amps	9.4	9.4	9.4	9.5	9.6	10.7	10.7	10.7	10.8	10.9	12.2	12.2	12.2	12.3	12.4	13.9	13.8	13.8	13.9	14.0	15.7	15.7	15.7	15.6	15.7	17.8	17.8	17.8	17.8	17.9	19.9	19.9	19.9	19.9	20.0	22.0	22.0	22.0	22.0	22.1	24.1	24.1	24.1	24.1	24.2	26.2	26.2	26.2	26.2	26.3															
HI PR	246	247	249	253	257	284	285	287	291	295	324	325	327	331	335	367	368	370	374	378	414	415	416	417	421	463	464	465	467	470	513	514	515	517	520	563	564	565	567	570	613	614	615	617	620	663	664	665	667	670																
LO PR	123	124	127	132	136	130	131	134	139	143	136	138	141	146	150	142	143	146	151	155	147	148	151	156	160	154	155	158	163	167	160	162	166	171	175	166	168	172	177	181	172	174	178	183	187	178	180	184	189	193																
85	MBh	47.9	48.6	49.9	52.1	54.6	47.5	48.1	49.5	51.6	54.1	46.3	46.9	48.3	50.4	52.9	44.2	44.9	46.2	48.4	50.9	41.7	42.3	43.7	45.8	48.3	39.3	40.0	41.4	43.5	46.0	36.8	37.5	38.9	41.0	43.1	34.3	35.0	36.4	38.5	40.6	31.8	32.5	33.9	36.0	38.1	29.3	30.0	31.4	33.5	35.6															
	S/T	1.00	0.92	0.79	0.7	0.57	1.00	0.93	0.80	0.7	0.57	1.00	1.00	0.82	0.7	0.57	1.00	1.00	0.84	0.7	0.57	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00															
	ΔT	30	28	25	21	18	30	28	25	21	18	30	28	25	22	19	30	28	25	21	18	30	28	25	21	18	30	28	25	21	18	30	28	25	21	18	30	28	25	21	18	30	28	25	21	18																				
	kW	2.53	2.52	2.52	2.5	2.54	2.82	2.82	2.81	2.8	2.84	3.15	3.14	3.14	3.2	3.24	3.50	3.50	3.49	3.5	3.54	3.90	3.89	3.89	3.89	3.9	4.36	4.36	4.36	4.36	4.4	4.82	4.82	4.82	4.82	4.82	5.28	5.28	5.28	5.28	5.28	5.74	5.74	5.74	5.74	5.74																				
	Amps	9.4	9.4	9.3	9.4	9.5	10.7	10.7	10.7	10.8	10.9	12.2	12.2	12.2	12.3	12.4	13.8	13.8	13.8	13.9	14.0	15.6	15.6	15.6	15.6	15.7	17.8	17.8	17.8	17.8	17.9	19.9	19.9	19.9	19.9	20.0	22.0	22.0	22.0	22.0	22.1	24.1	24.1	24.1	24.1	24.2																				
	HI PR	246	247	248	253	257	284	285	287	291	295	324	325	327	331	335	367	368	370	374	378	414	415	416	417	421	463	464	465	467	470	513	514	515	517	520	563	564	565	567	570																									
	LO PR	124	124	127	132	136	130	132	135	140	144	136	138	141	146	150	142	143	146	151	155	147	148	151	156	160	154	155	158	163	167	160	162	166	171	175	166	168	172	177	181	172	174	178	183	187																				
	MBh	48.5	49.1	50.5	52.6	55.1	48.1	48.7	50.1	52.2	54.7	46.9	47.5	48.9	51.0	53.5	44.8	45.4	46.8	48.9	51.4	42.2	42.9	44.3	46.4	48.9	39.9	40.6	42.0	44.1	46.6	37.4	38.1	39.5	41.6	43.7	34.9	35.6	37.0	39.1	41.2	32.4	33.1	34.5	36.6	38.7	29.9	30.6	32.0	34.1	36.2															
	S/T	1.00	0.95	0.82	0.7	0.57	1.00	0.96	0.83	0.7	0.57	1.00	1.00	0.85	0.7	0.57	1.00	1.00	0.87	0.7	0.57	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00																				
	ΔT	29	27	24	21	18	29	27	24	21	18	30	28	24	21	18	29	27	24	21	18	29	27	24	21	18	29	27	24	20	17	29	27	24	20	17	29	27	24	20	17																									
	kW	2.54	2.53	2.53	2.6	2.64	2.83	2.83	2.82	2.8	2.84	3.16	3.15	3.15	3.2	3.24	3.51	3.51	3.50	3.5	3.54	3.91	3.90	3.90	3.90	3.9	4.37	4.37	4.37	4.36	4.4	4.83	4.83	4.83	4.83	4.83	5.29	5.29	5.29	5.29	5.29	5.75	5.75	5.75	5.75	5.75																				
	Amps	9.4	9.4	9.4	9.5	9.6	10.8	10.8	10.8	10.9	11.0	12.3	12.3	12.3	12.4	12.5	13.9	13.9	13.9	14.0	14.1	15.7	15.7	15.7	15.7	15.8	17.8	17.8	17.8	17.8	17.9	19.9	19.9	19.9	19.9	20.0	22.0	22.0	22.0	22.0	22.1	24.1	24.1	24.1	24.1	24.2																				
HI PR	247	248	250	254	258	285	287	288	292	296	325	326	328	332	336																																																			

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																															
		65°F								75°F								85°F								95°F								105°F								115°F							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																
70	<b>1750</b>	MBh	57.6	58.4	60.1	-	57.1	57.9	59.6	-	55.6	56.4	58.1	-	53.0	53.8	55.5	-	49.8	50.6	52.4	-	47.0	47.8	49.5	-	47.0	47.8	49.5	-	47.0	47.8	49.5	-	47.0	47.8	49.5	-	47.0	47.8	49.5	-							
		S/T	0.60	0.53	0.40	-	0.61	0.54	0.40	-	0.63	0.56	0.43	-	0.65	0.58	0.45	-	1.00	0.60	0.47	-	1.00	0.65	0.52	-	1.00	0.65	0.52	-	1.00	0.65	0.52	-	1.00	0.65	0.52	-	1.00	0.65	0.52	-							
		Δ T	19	18	14	-	19	18	14	-	20	18	14	-	19	18	14	-	19	17	14	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-							
		kW	2.51	2.51	2.50	-	2.80	2.80	2.79	-	3.13	3.13	3.12	-	3.48	3.48	3.48	-	3.88	3.88	3.87	-	4.34	4.34	4.34	-	4.34	4.34	4.34	-	4.34	4.34	4.34	-	4.34	4.34	4.34	-	4.34	4.34	4.34	-							
		Amps	9.3	9.3	9.3	-	10.6	10.6	10.6	-	12.1	12.1	12.1	-	13.8	13.7	13.7	-	15.6	15.6	15.5	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-							
		HI PR	242	243	245	-	280	281	283	-	320	321	323	-	363	364	366	-	410	411	413	-	459	460	462	-	459	460	462	-	459	460	462	-	459	460	462	-	459	460	462	-							
	LO PR	119	121	124	-	126	128	131	-	133	134	137	-	138	139	143	-	143	145	148	-	150	151	154	-	150	151	154	-	150	151	154	-	150	151	154	-	150	151	154	-								
	<b>1890</b>	MBh	58.3	59.1	60.8	-	57.8	58.6	60.3	-	56.3	57.1	58.8	-	53.7	54.5	56.2	-	50.5	51.3	53.0	-	47.6	48.5	50.2	-	47.6	48.5	50.2	-	47.6	48.5	50.2	-	47.6	48.5	50.2	-	47.6	48.5	50.2	-							
		S/T	0.65	0.58	0.45	-	0.66	0.59	0.45	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.70	0.57	-	1.00	0.70	0.57	-	1.00	0.70	0.57	-	1.00	0.70	0.57	-											
		Δ T	18	17	13	-	18	17	13	-	19	17	13	-	18	17	13	-	18	16	13	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-											
		kW	2.52	2.52	2.52	-	2.82	2.81	2.81	-	3.14	3.14	3.14	-	3.50	3.49	3.49	-	3.89	3.89	3.88	-	4.36	4.35	4.35	-	4.36	4.35	4.35	-	4.36	4.35	4.35	-	4.36	4.35	4.35	-											
		Amps	9.4	9.3	9.3	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.8	13.8	13.8	-	15.6	15.6	15.6	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-	17.7	17.7	17.7	-											
HI PR		244	245	247	-	282	283	285	-	322	323	325	-	365	366	368	-	412	413	414	-	461	462	464	-	461	462	464	-	461	462	464	-	461	462	464	-												
LO PR	121	122	125	-	128	129	132	-	134	136	139	-	140	141	144	-	145	146	149	-	151	153	156	-	151	153	156	-	151	153	156	-	151	153	156	-													
<b>2250</b>	MBh	59.1	59.9	61.6	-	58.6	59.4	61.1	-	57.1	57.9	59.6	-	54.5	55.3	57.0	-	51.3	52.1	53.9	-	48.4	49.3	51.0	-	48.4	49.3	51.0	-	48.4	49.3	51.0	-	48.4	49.3	51.0	-												
	S/T	0.68	0.61	0.48	-	0.69	0.62	0.48	-	0.71	0.64	0.51	-	0.73	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-	1.00	0.73	0.60	-																
	Δ T	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	17	15	12	-	18	17	13	-	18	17	13	-	18	17	13	-																
	kW	2.53	2.53	2.53	-	2.83	2.82	2.82	-	3.15	3.15	3.15	-	3.51	3.51	3.50	-	3.90	3.90	3.90	-	4.37	4.37	4.36	-	4.37	4.37	4.36	-	4.37	4.37	4.36	-																
	Amps	9.4	9.4	9.4	-	10.7	10.7	10.7	-	12.2	12.2	12.2	-	13.9	13.9	13.8	-	15.7	15.7	15.6	-	17.8	17.8	17.8	-	17.8	17.8	17.8	-	17.8	17.8	17.8	-																
	HI PR	246	247	249	-	284	285	287	-	324	325	327	-	367	368	370	-	413	415	416	-	463	464	466	-	463	464	466	-	463	464	466	-																
LO PR	122	124	127	-	130	131	134	-	136	137	140	-	141	143	146	-	147	148	151	-	153	155	158	-	153	155	158	-	153	155	158	-																	
75	<b>1750</b>	MBh	57.6	58.4	60.2	62.8	57.1	57.9	59.6	62.3	55.6	56.4	58.1	60.8	53.0	53.8	55.6	58.2	49.9	50.7	52.4	55.0	47.0	47.8	49.5	52.1	47.0	47.8	49.5	52.1																			
		S/T	0.73	0.66	0.52	0.38	0.74	0.66	0.53	0.39	0.76	0.69	0.55	0.41	1.00	0.71	0.57	0.43	1.00	0.73	0.59	0.45	1.00	0.78	0.64	0.50	1.00	0.78	0.64	0.50																			
		Δ T	23	22	18	15	23	22	18	15	24	22	18	15	23	21	18	15	23	21	18	14	24	22	19	16	24	22	19	16																			
		kW	2.51	2.50	2.50	2.52	2.80	2.80	2.79	2.82	3.13	3.13	3.12	3.14	3.48	3.48	3.47	3.50	3.88	3.87	3.87	3.89	4.34	4.34	4.34	4.36	4.34	4.34	4.34	4.36																			
		Amps	9.3	9.3	9.3	9.4	10.6	10.6	10.6	10.7	12.1	12.1	12.1	12.2	13.7	13.7	13.7	13.8	15.6	15.5	15.5	15.6	17.7	17.7	17.7	17.8	17.7	17.7	17.7	17.8																			
		HI PR	242	243	245	249	281	282	283	288	321	322	323	328	364	365	366	371	410	411	413	417	460	461	462	467	460	461	462	467																			
	LO PR	119	121	124	129	126	128	131	136	133	134	137	142	138	140	143	148	143	145	148	153	150	151	154	159	150	151	154	159																				
	<b>1890</b>	MBh	58.3	59.1	60.8	63.5	57.8	58.6	60.3	62.9	56.3	57.1	58.8	61.4	53.7	54.5	56.2	58.9	50.6	51.4	53.1	55.7	47.7	48.5	50.2	52.8	47.7	48.5	50.2	52.8																			
		S/T	0.78	0.71	0.57	0.43	0.79	0.71	0.58	0.44	1.00	0.74	0.60	0.46	1.00	0.76	0.62	0.48	1.00	0.78	0.64	0.50	1.00	0.83	0.69	0.55	1.00	0.83	0.69	0.55																			
		Δ T	22	21	17	14	22	21	17	14	23	21	17	14	22	21	17	14	22	20	17	13	23	21	18	15	23	21	18	15																			
		kW	2.52	2.52	2.51	2.54	2.81	2.81	2.81	2.83	3.14	3.14	3.13	3.16	3.49	3.49	3.49	3.51	3.89	3.89	3.88	3.91	4.35	4.35	4.35	4.37	4.35	4.35	4.35	4.37																			
		Amps	9.3	9.3	9.3	9.4	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.3	13.8	13.8	13.8	13.9	15.6	15.6	15.6	15.7	17.7	17.7	17.7	17.8	17.7	17.7	17.7	17.8																			
HI PR		244	245	247	251	282	283	285	289	322	323	325	329	365	367	368	372	412	413	415	419	461	463	464	468	461	463	464	468																				
LO PR	121	122	125	130	128	129	132	137	134	136	139	144	140	141	144	149	145	146	149	154	151	153	156	161	151	153	156	161																					
<b>2250</b>	MBh	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.5	55.3	57.0	59.7	51.4	52.2	53.9	56.5	48.5	49.3	51.0	53.6	48.5	49.3	51.0	53.6																				
	S/T	0.81	0.74	0.60	0.46	0.82	0.74	0.61	0.47	1.00	0.77	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.81	0.67	0.53	1.00	1.00	0.72	0.58	1.00	1.00	0.72	0.58																				
	Δ T	22	20	16	13	22	20	16	13	22	20	17	13	22	20	16	13	21	19	16	13	22	21	17	14	22	21	17	14																				
	kW	2.53	2.53	2.52	2.55	2.82	2.82	2.82	2.84	3.15	3.15	3.14	3.17	3.51	3.50	3.50	3.52	3.90	3.90	3.89	3.92	4.37	4.36	4.36	4.38	4.37	4.36	4.36	4.38																				
	Amps	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.3	13.9	13.8	13.8	13.9	15.7	15.7	15.6	15.7	17.8	17.8	17.8	17.9	17.8	17.8	17.8	17.9																				
	HI PR	246	247	249	253	284	285	287	291	324	325	327	331	367	368	370	374	414	415	416	421	463	464	466	470	463	464	466	470																				
LO PR	122	124	127	132	130	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163	153	155	158	163																					

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

</



IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	57.9	58.7	60.4	63.1	57.4	58.2	59.9	62.6	55.9	56.7	58.4	61.1	53.3	54.1	55.9	58.5	50.2	51.0	52.7	55.3	47.3	48.1	49.8	52.4
	S/T	0.85	0.78	0.65	0.51	1.00	0.78	0.65	0.51	1.00	0.81	0.68	0.54	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.58	1.00	1.00	0.77	0.63
	Δ T	27	26	22	19	27	26	22	19	28	26	22	19	27	25	22	19	27	25	22	18	28	26	23	20
	KW	2.51	2.51	2.50	2.52	2.80	2.80	2.79	2.82	3.13	3.13	3.12	3.14	3.48	3.48	3.48	3.50	3.88	3.88	3.87	3.89	4.34	4.34	4.34	4.36
	Amps	9.3	9.3	9.3	9.4	10.6	10.6	10.6	10.7	12.1	12.1	12.1	12.2	13.8	13.7	13.7	13.8	15.6	15.6	15.5	15.6	17.7	17.7	17.7	17.8
	HI PR	243	244	246	250	281	282	284	288	321	322	324	328	364	365	367	371	411	412	413	418	460	461	463	467
LO PR	120	121	124	129	127	128	131	136	133	135	138	143	139	140	143	148	144	145	148	153	150	152	155	160	
80	MBh	58.6	59.4	61.1	63.8	58.1	58.9	60.6	63.2	56.6	57.4	59.1	61.7	54.0	54.8	56.5	59.2	50.9	51.7	53.4	56.0	48.0	48.8	50.5	53.1
	S/T	0.90	0.83	0.70	0.56	1.00	0.83	0.70	0.56	1.00	0.86	0.73	0.59	1.00	0.88	0.75	0.61	1.00	1.00	0.77	0.63	1.00	1.00	0.82	0.68
	Δ T	26	25	21	18	26	25	21	18	27	25	21	18	26	25	21	18	26	24	21	17	27	25	22	19
	KW	2.52	2.52	2.51	2.54	2.82	2.81	2.81	2.83	3.14	3.14	3.13	3.16	3.50	3.49	3.49	3.51	3.89	3.89	3.88	3.91	4.36	4.35	4.35	4.37
	Amps	9.4	9.3	9.3	9.4	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.3	13.8	13.8	13.8	13.9	15.6	15.6	15.6	15.7	17.7	17.7	17.7	17.8
	HI PR	245	246	247	252	283	284	286	290	323	324	326	330	366	367	369	373	412	413	415	419	462	463	465	469
LO PR	121	123	126	131	128	130	133	138	135	136	139	144	140	142	145	150	147	149	150	155	152	153	156	162	
80	MBh	59.4	60.2	61.9	64.6	58.9	59.7	61.4	64.1	57.4	58.2	59.9	62.6	54.8	55.6	57.3	60.0	51.7	52.5	54.2	56.8	48.8	49.6	51.3	53.9
	S/T	1.00	0.86	0.73	0.59	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.62	1.00	0.91	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	0.85	0.71
	Δ T	26	24	20	17	26	24	20	17	26	24	21	17	26	24	20	17	25	23	20	17	26	25	21	18
	KW	2.53	2.53	2.53	2.55	2.83	2.82	2.82	2.84	3.15	3.15	3.15	3.17	3.51	3.51	3.50	3.52	3.90	3.90	3.90	3.92	4.37	4.36	4.36	4.38
	Amps	9.4	9.4	9.4	9.5	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.3	13.9	13.9	13.8	13.9	15.7	15.7	15.6	15.7	17.8	17.8	17.8	17.9
	HI PR	246	248	249	253	285	286	287	292	325	326	327	332	368	369	370	375	414	415	417	421	464	465	466	471
LO PR	123	124	127	132	130	132	135	140	137	138	141	146	142	143	146	151	147	149	152	157	154	155	158	163	
85	MBh	58.9	59.7	61.4	64.0	58.4	59.2	60.9	63.5	56.9	57.7	59.4	62.0	54.3	55.1	56.8	59.4	51.1	51.9	53.7	56.3	48.3	49.1	50.8	53.4
	S/T	1.00	0.88	0.74	0.6	1.00	0.88	0.75	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.87	0.7
	Δ T	31	29	26	22	31	29	26	22	31	29	26	22	31	29	26	22	31	29	25	22	32	30	27	23
	KW	2.51	2.51	2.51	2.5	2.81	2.81	2.80	2.8	3.13	3.13	3.13	3.1	3.49	3.49	3.48	3.5	3.88	3.88	3.88	3.9	4.35	4.35	4.34	4.4
	Amps	9.3	9.3	9.3	9.4	10.7	10.7	10.6	10.7	12.2	12.2	12.1	12.2	13.8	13.8	13.7	13.8	15.6	15.6	15.6	15.7	17.7	17.7	17.7	17.8
	HI PR	244	245	247	251	282	283	285	289	322	323	325	329	365	366	368	372	412	413	414	419	461	462	464	468
LO PR	121	123	126	131	129	130	133	138	135	136	139	145	140	142	145	150	146	147	149	155	152	154	157	162	
85	MBh	59.6	60.4	62.1	64.7	59.1	59.9	61.6	64.2	57.6	58.4	60.1	62.7	55.0	55.8	57.5	60.1	51.8	52.6	54.3	57.0	48.9	49.8	51.5	54.1
	S/T	1.00	0.93	0.79	0.7	1.00	0.93	0.80	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.92	0.8
	Δ T	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	26	22
	KW	2.53	2.53	2.52	2.5	2.82	2.82	2.81	2.8	3.15	3.15	3.14	3.2	3.50	3.50	3.49	3.5	3.90	3.89	3.89	3.9	4.36	4.36	4.35	4.4
	Amps	9.4	9.4	9.3	9.4	10.7	10.7	10.7	10.8	12.2	12.2	12.2	12.3	13.8	13.8	13.8	13.9	15.6	15.6	15.6	15.7	17.8	17.8	17.7	17.8
	HI PR	246	247	249	253	284	285	287	291	324	325	327	331	367	368	370	374	413	415	416	420	463	464	466	470
LO PR	123	124	127	133	130	132	135	140	137	138	141	146	142	143	146	151	147	149	152	157	154	155	158	163	
85	MBh	60.4	61.2	62.9	65.5	59.9	60.7	62.4	65.0	58.4	59.2	60.9	63.5	55.8	56.6	58.3	60.9	52.6	53.4	55.2	57.8	49.7	50.6	52.3	54.9
	S/T	1.00	0.96	0.82	0.7	1.00	0.96	0.83	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.90	0.8	1.00	1.00	1.00	0.8
	Δ T	29	27	24	20	29	27	24	20	29	28	24	21	29	27	24	20	29	27	24	20	30	28	25	21
	KW	2.54	2.54	2.53	2.6	2.83	2.83	2.82	2.8	3.16	3.16	3.15	3.2	3.51	3.51	3.51	3.5	3.91	3.91	3.90	3.9	4.37	4.37	4.37	4.4
	Amps	9.4	9.4	9.4	9.5	10.8	10.8	10.7	10.8	12.3	12.3	12.2	12.3	13.9	13.9	13.9	14.0	15.7	15.7	15.7	15.8	17.8	17.8	17.8	17.9
	HI PR	248	249	250	255	286	287	289	293	326	327	329	333	369	370	372	376	415	416	418	422	465	466	468	472
LO PR	125	126	129	134	132	133	136	142	138	140	143	148	144	145	148	153	149	150	153	158	155	157	160	165	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI Rating Conditions.  
 kW = Total system power  
 Amps = Outdoor unit amps (compressor + fan)

**GSZH501810A\*+AMST30BU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	22.7	21.2	19.8	18.3	17.4	16.7	15.0	13.4	12.1	11.1	10.4	10.0	9.5	8.3	7.0	5.8	4.6
T/R	32.6	30.8	28.9	27.1	26.0	25.0	22.4	20.0	18.0	16.6	15.5	14.9	14.2	12.4	10.5	8.7	6.8
kW	1.4	1.4	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.1
Amps	5.1	5.0	4.9	4.8	4.7	4.7	4.6	4.5	4.4	4.3	4.2	4.1	4.1	4.0	3.9	3.8	3.7
COP	4.79	4.55	4.31	4.06	3.90	3.77	3.44	3.13	2.88	2.69	2.57	2.50	2.40	2.13	1.85	1.55	1.25
HI PR	363	351	339	327	320	315	304	292	280	268	257	249	245	233	221	209	198
LO PR	148	139	130	121	115	111	102	93	84	74	65	60	56	47	38	28	19

**GSZH502410A\*+AMST30BU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	30.5	28.4	26.4	24.5	23.2	22.2	19.8	17.7	15.9	14.5	13.5	13.0	12.3	10.6	8.9	7.2	5.5
T/R	33.9	32.0	30.0	28.0	26.9	25.7	23.0	20.4	18.4	16.8	15.7	15.0	14.3	12.3	10.3	8.4	6.4
kW	2.0	2.0	1.9	1.9	1.8	1.8	1.7	1.7	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.3	1.3
Amps	7.5	7.3	7.1	6.9	6.7	6.6	6.4	6.2	5.9	5.7	5.5	5.4	5.3	5.0	4.8	4.6	4.4
COP	4.41	4.22	4.03	3.84	3.70	3.59	3.30	3.02	2.80	2.65	2.55	2.50	2.40	2.15	1.87	1.57	1.25
HI PR	377	365	353	340	333	328	316	304	291	279	267	259	254	242	230	218	205
LO PR	142	133	124	116	110	107	98	89	80	71	62	57	54	45	36	27	18

**GSZH503010A\*+AMST30BU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	36.4	34.2	32.0	29.8	28.4	27.4	24.8	22.4	20.5	19.0	18.0	17.4	16.7	14.8	13.0	11.2	9.3
T/R	32.4	30.7	29.0	27.3	26.3	25.4	23.0	20.8	18.9	17.6	16.6	16.1	15.4	13.7	12.0	10.3	8.6
kW	2.4	2.3	2.3	2.3	2.2	2.2	2.2	2.2	2.1	2.1	2.1	2.0	2.0	2.0	2.0	1.9	1.9
Amps	8.7	8.6	8.4	8.3	8.2	8.1	8.0	7.8	7.7	7.5	7.4	7.3	7.2	7.1	6.9	6.8	6.6
COP	4.49	4.28	4.06	3.85	3.70	3.59	3.31	3.04	2.81	2.66	2.56	2.50	2.41	2.18	1.95	1.70	1.45
HI PR	385	373	360	348	340	335	323	310	298	285	273	265	260	248	235	222	210
LO PR	137	129	120	112	107	103	95	86	77	69	60	55	52	43	35	26	18

**GSZH503610A\*+AMST42CU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	44.8	41.9	39.0	36.2	34.4	33.1	29.7	26.6	24.0	22.1	20.8	20.0	19.0	16.6	14.2	11.8	9.4
T/R	36.9	34.8	32.8	30.7	29.5	28.4	25.5	22.8	20.6	19.0	17.8	17.1	16.3	14.3	12.2	10.1	8.1
kW	3.1	3.1	3.0	2.9	2.9	2.9	2.8	2.7	2.6	2.6	2.5	2.4	2.4	2.3	2.3	2.2	2.1
Amps	12.0	11.6	11.3	11.0	10.8	10.7	10.4	10.0	9.7	9.4	9.1	8.9	8.8	8.5	8.1	7.8	7.5
COP	4.17	4.00	3.81	3.63	3.50	3.40	3.13	2.88	2.68	2.54	2.45	2.40	2.31	2.08	1.84	1.58	1.30
HI PR	397	384	371	358	351	345	332	320	307	294	281	273	268	255	242	229	216
LO PR	133	125	117	108	104	100	92	84	75	67	59	54	50	42	34	26	17

Above information is for nominal CFM and 70 degree indoor dry bulb. Instantaneous capacity listed.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

Goodman Manufacturing Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

**GSZH504210A\*+AMST42CU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	51.6	48.3	45.2	42.0	40.0	38.5	34.8	31.3	28.5	26.4	24.8	24.0	22.9	20.3	17.6	14.9	12.3
T/R	34.3	32.4	30.6	28.7	27.6	26.6	24.0	21.6	19.7	18.2	17.2	16.6	15.8	14.0	12.2	10.3	8.5
kW	3.5	3.4	3.3	3.3	3.3	3.2	3.2	3.1	3.1	3.0	3.0	2.9	2.9	2.9	2.8	2.7	2.7
Amps	12.9	12.6	12.4	12.2	12.0	11.9	11.7	11.5	11.2	11.0	10.8	10.6	10.5	10.3	10.0	9.8	9.6
COP	4.38	4.17	3.96	3.74	3.60	3.49	3.21	2.94	2.72	2.56	2.46	2.40	2.31	2.08	1.84	1.59	1.34
HI PR	395	382	369	356	348	343	330	318	305	292	279	271	266	253	241	228	215
LO PR	132	124	115	107	102	99	91	83	74	66	58	53	50	42	33	25	17

**GSZH504810A\*+AMST48CU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	59.1	55.4	51.8	48.3	46.0	44.4	40.2	36.2	33.0	30.7	28.9	28.0	26.8	23.8	20.8	17.8	14.8
T/R	36.0	34.1	32.2	30.3	29.2	28.1	25.5	23.0	20.9	19.4	18.3	17.8	17.0	15.1	13.2	11.3	9.4
kW	3.9	3.8	3.7	3.7	3.6	3.6	3.5	3.5	3.4	3.4	3.3	3.3	3.3	3.2	3.1	3.1	3.0
Amps	14.5	14.2	13.9	13.7	13.5	13.4	13.2	12.9	12.6	12.4	12.1	12.0	11.9	11.6	11.3	11.1	10.8
COP	4.48	4.27	4.06	3.85	3.70	3.59	3.31	3.03	2.81	2.66	2.55	2.50	2.41	2.18	1.94	1.69	1.44
HI PR	433	419	405	391	382	376	362	348	334	320	306	298	292	278	264	250	236
LO PR	137	128	120	111	106	103	94	86	77	69	60	55	52	43	35	26	18

**GSZH506010A\*+AMST60DU1400A\***

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	71.1	67.2	63.3	59.5	57.0	55.2	51.0	46.4	43.2	40.7	38.9	38.0	36.7	33.6	30.4	27.2	24.1
T/R	35.4	33.7	32.1	30.5	29.5	28.6	26.4	24.2	22.4	21.1	20.1	19.7	19.0	17.4	15.7	14.1	12.4
kW	4.7	4.7	4.6	4.6	4.5	4.5	4.4	4.4	4.3	4.2	4.2	4.1	4.1	4.0	4.0	3.9	3.8
Amps	17.8	17.5	17.2	17.0	16.8	16.7	16.4	16.1	15.8	15.5	15.3	15.1	15.0	14.7	14.4	14.1	13.8
COP	4.39	4.20	4.02	3.83	3.70	3.60	3.38	3.12	2.95	2.82	2.74	2.70	2.63	2.44	2.24	2.04	1.84
HI PR	427	413	400	386	377	372	358	344	330	316	302	294	288	274	261	247	233
LO PR	130	122	114	105	101	97	89	81	73	65	57	52	49	41	33	25	17

Above information is for nominal CFM and 70 degree indoor dry bulb. Instantaneous capacity listed.

Amps = Outdoor unit amps (comp.+fan)

kW = Total system power

Goodman Manufacturing Company, L.P. reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations.

GSZH501810A* + AMST30BU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	18,850	14,150	4,700	1,100
80	18,650	14,000	4,650	1,160
85	18,400	13,800	4,600	1,220
90	18,000	13,500	4,500	1,290
<b>95</b>	<b>17,600</b>	<b>13,150</b>	<b>4,450</b>	<b>1,350</b>
100	17,100	12,800	4,300	1,430
105	16,600	12,450	4,150	1,500
110	16,150	12,100	4,050	1,590
115	15,700	11,750	3,950	1,670
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	16,950	13,200	3,750	1,350

GSZH503010A* + AMST30BU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 975 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,450	23,100	7,350	1,820
80	30,100	22,850	7,250	1,920
85	29,700	22,550	7,150	2,020
90	29,050	22,050	7,000	2,140
<b>95</b>	<b>28,400</b>	<b>21,550</b>	<b>6,850</b>	<b>2,250</b>
100	27,600	20,950	6,650	2,380
105	26,800	20,350	6,450	2,500
110	26,100	19,800	6,300	2,650
115	25,350	19,250	6,100	2,790
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	27,400	21,650	5,750	2,250


GSZH504210A* + AMST42CU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1140 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	42,900	31,950	10,950	2,500
80	42,400	31,550	10,850	2,640
85	41,850	31,150	10,700	2,780
90	40,950	30,500	10,450	2,940
<b>95</b>	<b>40,000</b>	<b>29,800</b>	<b>10,200</b>	<b>3,090</b>
100	38,900	28,950	9,950	3,260
105	37,750	28,100	9,650	3,430
110	36,750	27,350	9,400	3,630
115	35,750	26,600	9,150	3,830
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	38,550	29,850	8,700	3,090

GSZH506010A* + AMST60DU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1850 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	60,600	44,000	16,600	2,810
80	59,850	43,500	16,350	2,970
85	59,100	42,950	16,150	3,130
90	57,850	42,000	15,850	3,310
<b>95</b>	<b>56,550</b>	<b>41,050</b>	<b>15,500</b>	<b>3,490</b>
100	55,000	39,900	15,100	3,690
105	53,400	38,750	14,650	3,880
110	51,950	37,700	14,250	4,120
115	50,500	36,650	13,850	4,350
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
95°	54,500	41,150	13,350	3,490

GSZH502410A* + AMST30BU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 800 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	24,900	18,600	6,300	1,440
80	24,600	18,400	6,200	1,530
85	24,250	18,150	6,100	1,610
90	23,750	17,750	6,000	1,700
<b>95</b>	<b>23,200</b>	<b>17,350</b>	<b>5,850</b>	<b>1,780</b>
100	22,550	16,900	5,650	1,880
105	21,900	16,400	5,500	1,980
110	21,300	15,950	5,350	2,100
115	20,700	15,500	5,200	2,210
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	22,350	17,400	4,950	1,780

GSZH503610A* + AMST42CU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1060 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	37,800	28,250	9,550	2,170
80	37,350	27,900	9,450	2,310
85	36,900	27,550	9,350	2,440
90	36,100	26,950	9,150	2,590
<b>95</b>	<b>35,300</b>	<b>26,350</b>	<b>8,950</b>	<b>2,730</b>
100	34,350	25,650	8,700	2,890
105	33,350	24,900	8,450	3,050
110	32,450	24,250	8,200	3,240
115	31,550	23,600	7,950	3,430
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	34,050	26,400	7,650	2,730

GSZH504810A* + AMST48CU1400A*				
CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	49,350	37,100	12,250	2,820
80	48,750	36,650	12,100	2,980
85	48,150	36,200	11,950	3,140
90	47,100	35,400	11,700	3,320
<b>95</b>	<b>46,050</b>	<b>34,600</b>	<b>11,450</b>	<b>3,500</b>
100	44,800	33,650	11,150	3,700
105	43,500	32,700	10,800	3,890
110	42,350	31,850	10,500	4,130
115	41,200	30,950	10,250	4,360
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
95°	44,450	34,700	9,750	3,500

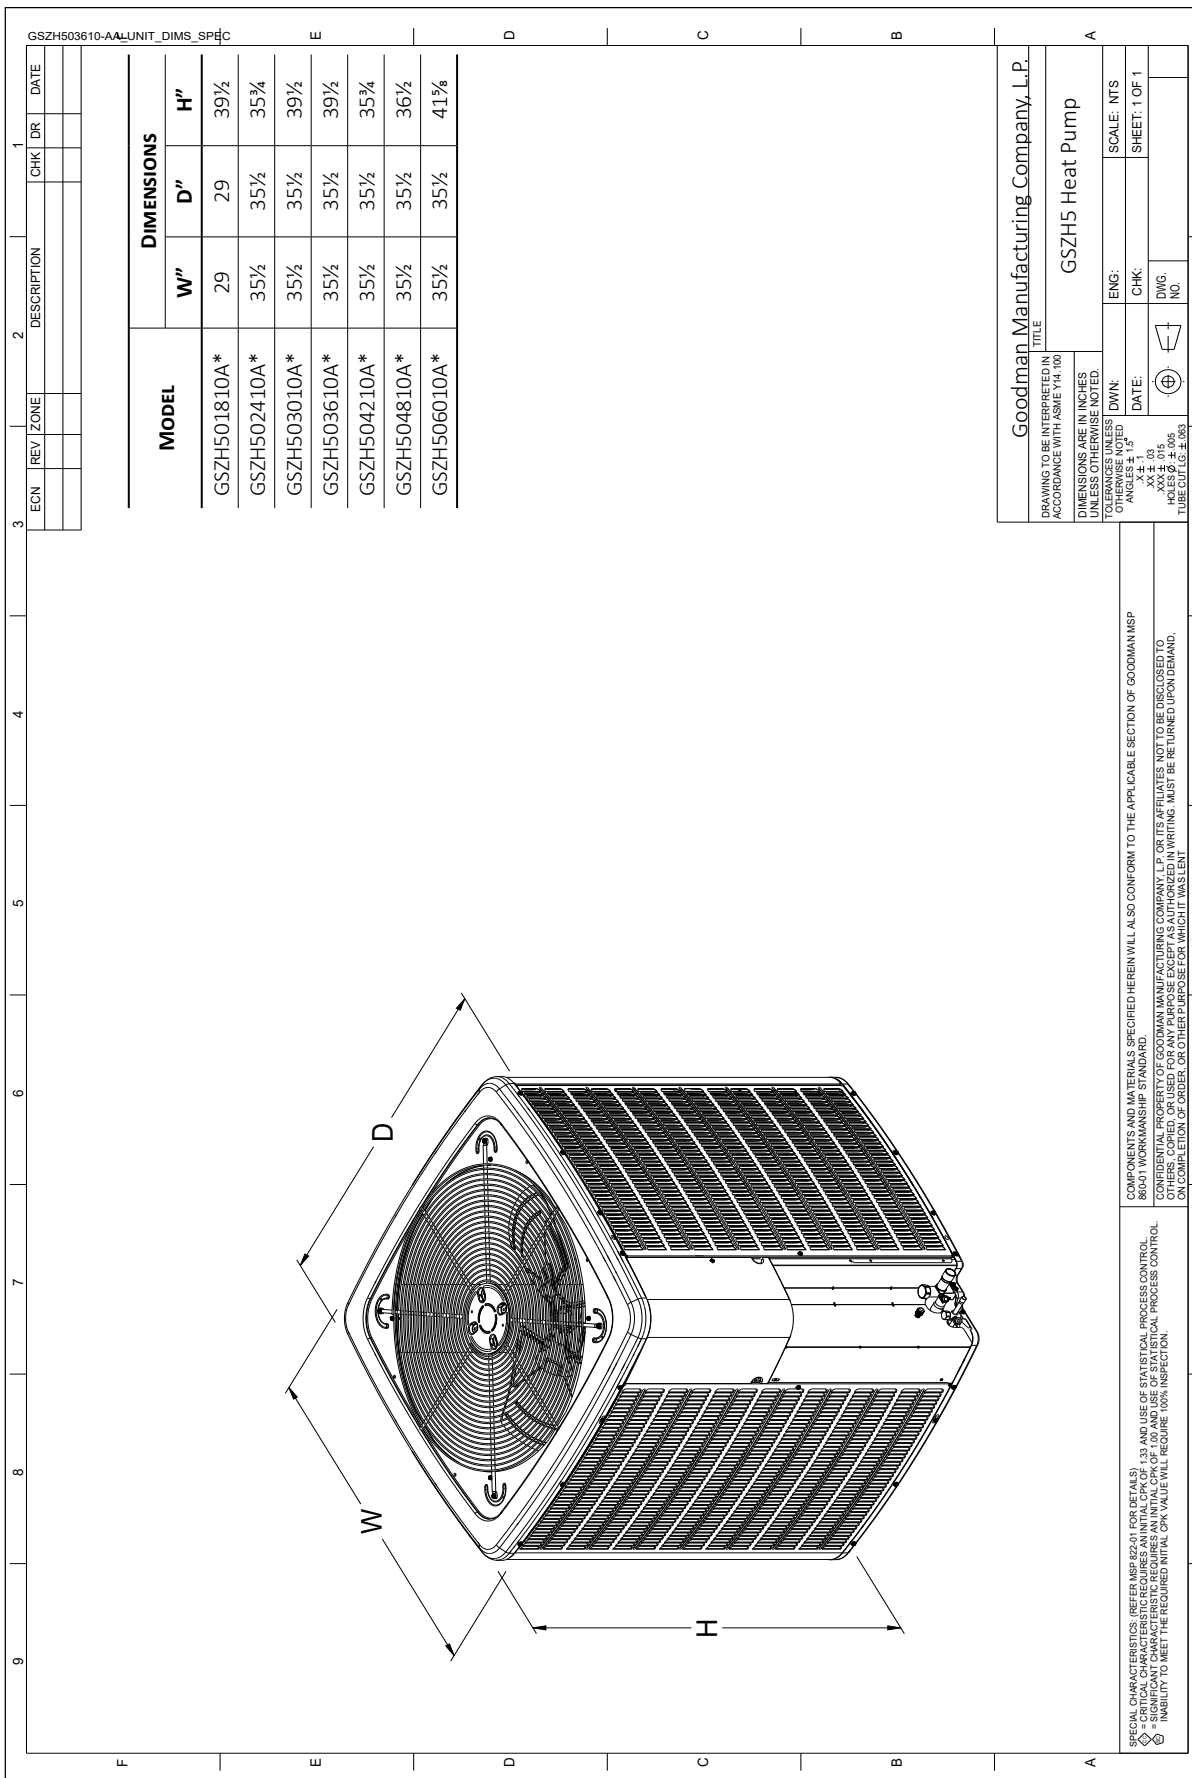

GSZH503610-AALLUNIT\_DIMS\_SPEIC

ECN	REV	ZONE	DESCRIPTION	CHK	DR	DATE

**DIMENSIONS**

MODEL	W"	D"	H"
GSZH501810A*	29	29	39½
GSZH502410A*	35½	35½	35¾
GSZH503010A*	35½	35½	39¾
GSZH503610A*	35½	35½	39¾
GSZH504210A*	35½	35½	35¾
GSZH504810A*	35½	35½	36¾
GSZH506010A*	35½	35½	41¾

Goodman Manufacturing Company, L.P.

DRIVING TO BE INTERPRETED IN ACCORDANCE WITH ASME Y14.100

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

TOLERANCES UNLESS OTHERWISE SPECIFIED:

ANGLES ± 1°

DWN: DATE: ENG: SCALE: NTS

CHK: DWG. SHEET: 1 OF 1

NO. NO.

⊕

HOLES ± .005

TUBE CUT TO ± .003

COMPONENTS AND MATERIALS SPECIFIED HEREIN WILL ALSO CONFORM TO THE APPLICABLE SECTION OF GOODMAN MSP 80001 WORKMANSHIP STANDARD.


CONFIDENTIAL PROPERTY OF GOODMAN MANUFACTURING COMPANY, L.P. OR ITS AFFILIATES. NOT TO BE DISCLOSED TO OTHERS, COPIED, OR USED FOR ANY PURPOSE EXCEPT AS AUTHORIZED IN WRITING. MUST BE RETURNED UPON DEMAND, ON COMPLETION OF ORDER, OR OTHER PURPOSE FOR WHICH ISSUED.

SPECIAL CHARACTERISTICS: (REFER MSP 822.01 FOR DETAILS)

⊕ = CRITICAL CHARACTERISTIC REQUIRES AN INITIAL CPK OF 1.33 AND USE OF STATISTICAL PROCESS CONTROL.

⊗ = SIGNIFICANT CHARACTERISTIC REQUIRES AN INITIAL CPK OF .90 AND USE OF STATISTICAL PROCESS CONTROL.


⊕ = INHERIT TO MEET THE REQUIRED ANNUAL CPA VALUE WILL REQUIRE 100% INSPECTION.

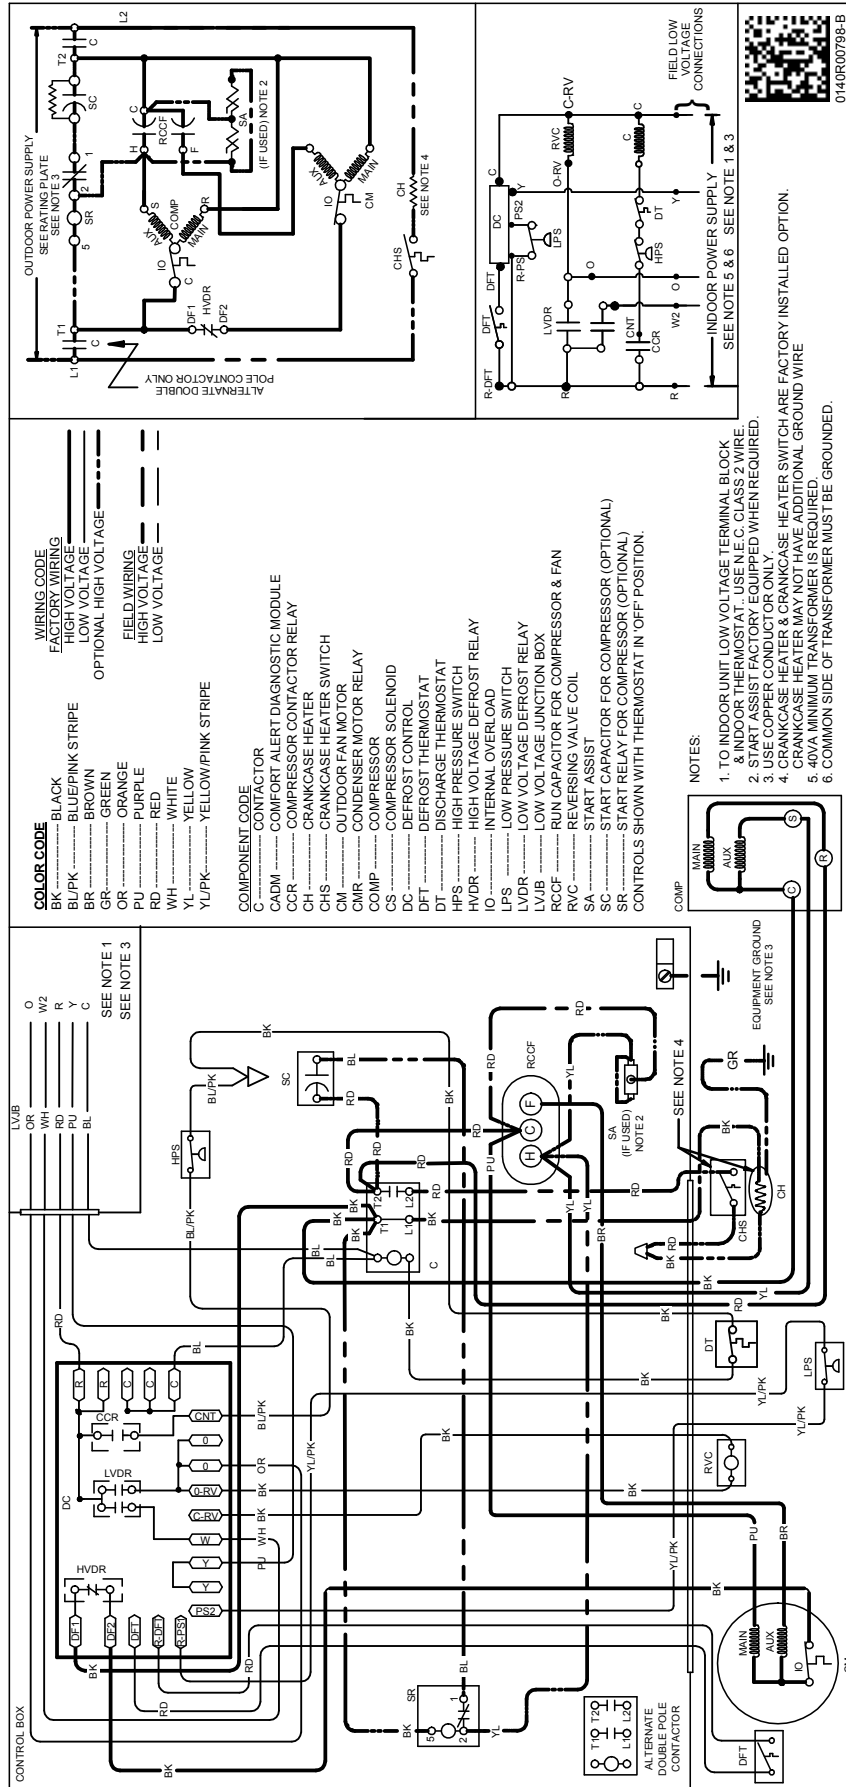

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

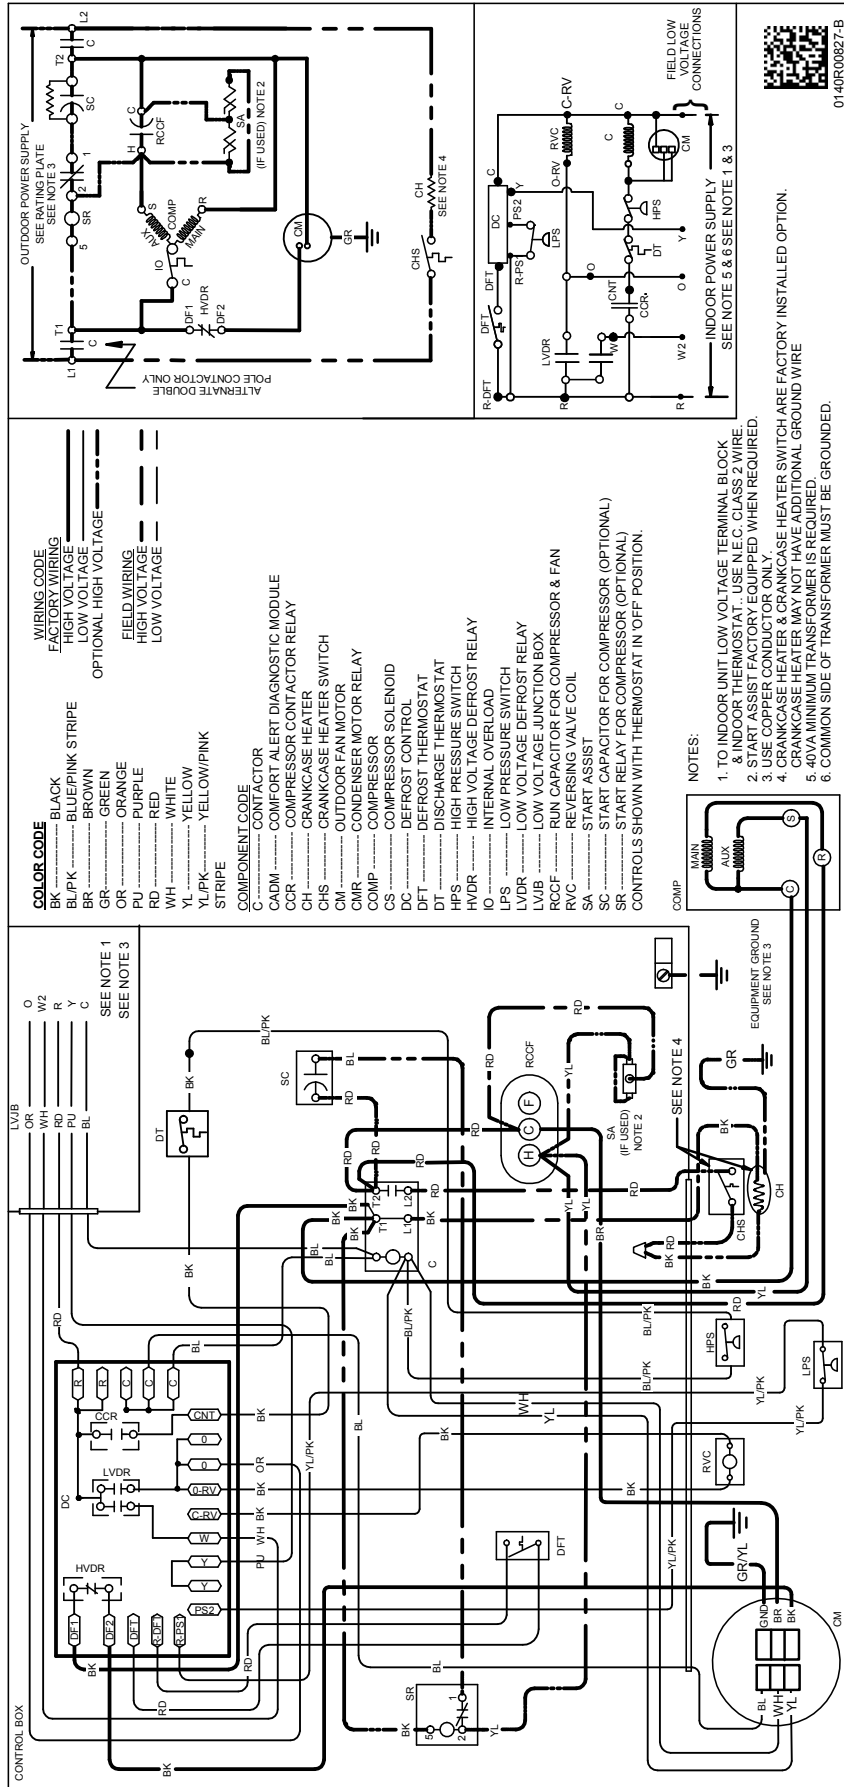


Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

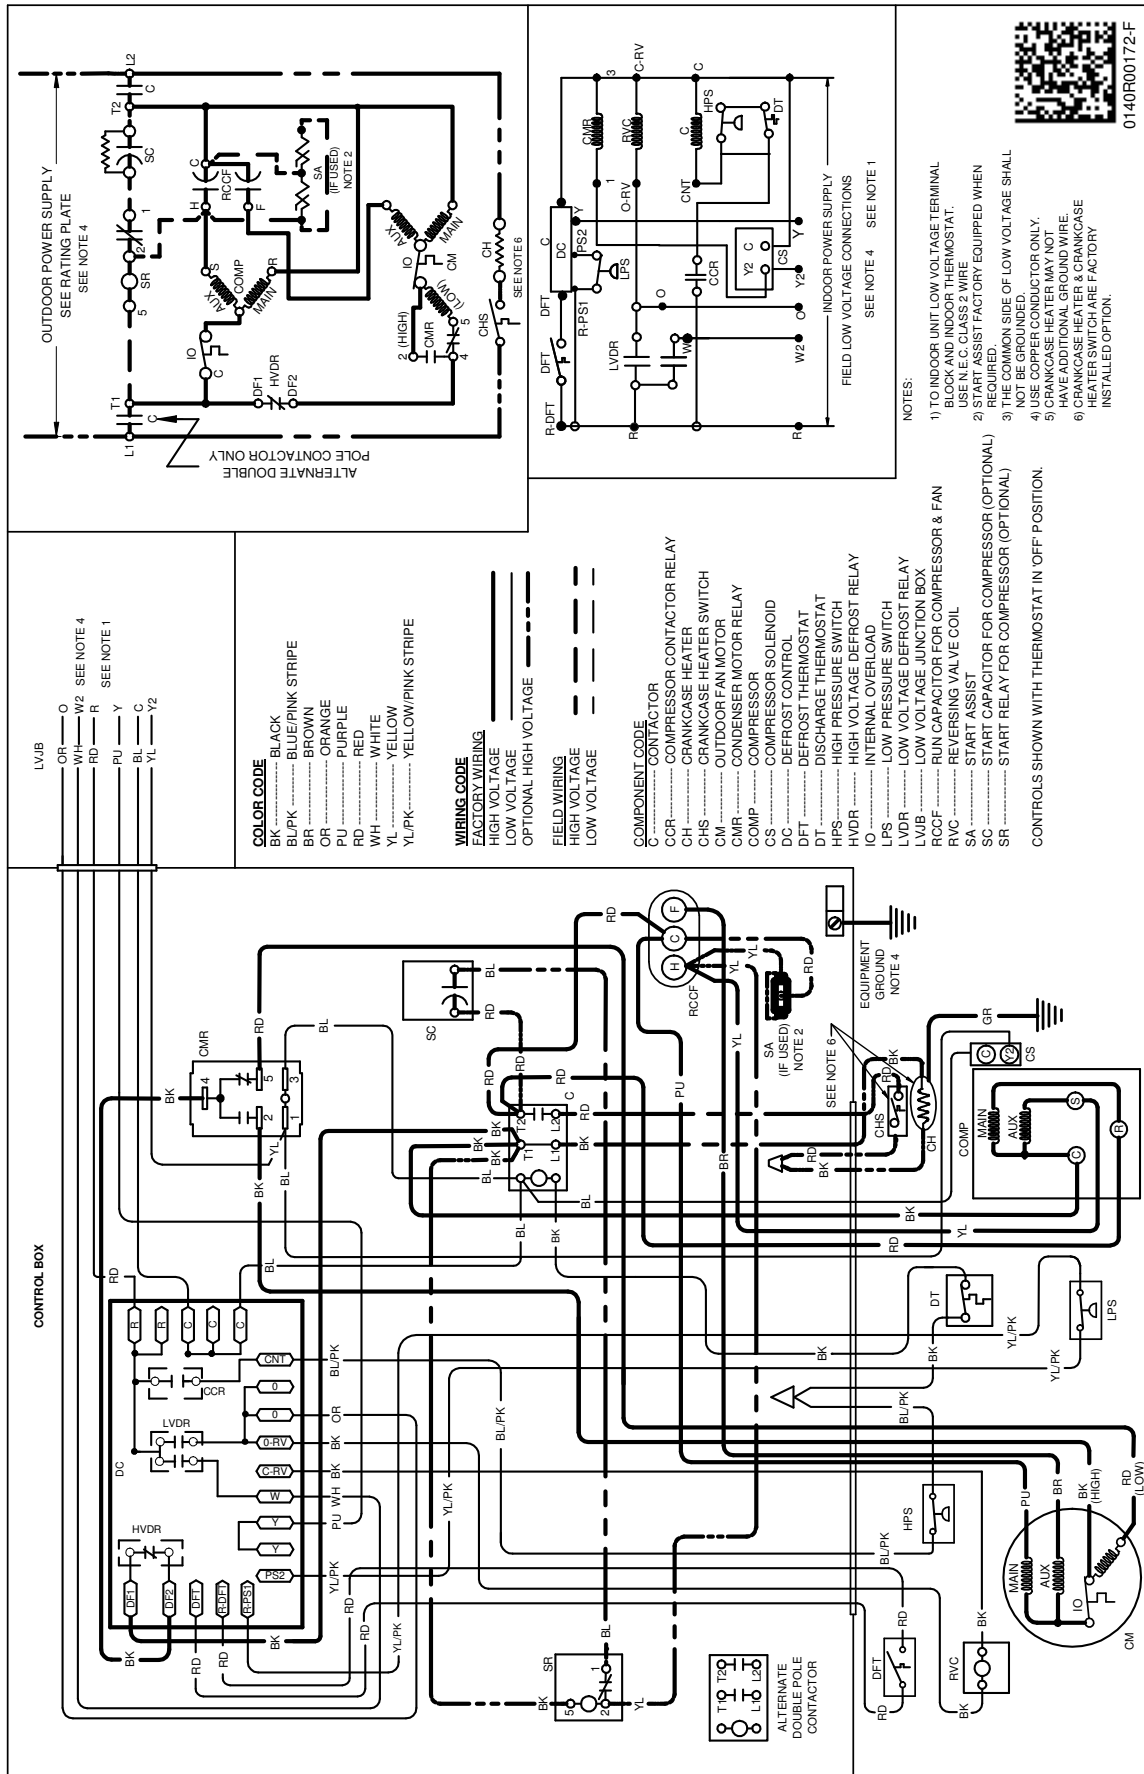

0140R00172-F

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



MODEL #	DESCRIPTION	GSZH5 01810A*	GSZH5 02410A*	GSZH5 03010A*	GSZH5 03610A*	GSZH5 04210A*	GSZH5 04810A*	GSZH5 06010A*
ABK-20	Anchor Bracket Kit <sup>∅</sup>	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit					X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
OT18-60A <sup>2</sup>	Outdoor Thermostat w/ Lockout Stat	X	X	X	X	X	X	X
TXV-FX-KX-2T <sup>3</sup>	TXV Kit	X	X					
TXV-FX-KX-3T <sup>3</sup>	TXV Kit			X	X			
TXV-FX-KX-5T <sup>3</sup>	TXV Kit					X	X	X

<sup>∅</sup> Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Required for heat pump applications where ambient temperatures fall below 0°F with 50% or higher relative humidity.

<sup>3</sup> Condensing units and heat pumps with reciprocating or rotary compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.

