

MRCOOL


Olympus Hyper Heat Series Ductless Mini-Split Heat Pump A/C

Enhanced Performance



Superior Heating
Saves you money
Supreme efficiency
Low ambient cooling

7 Year Compressor &
5 Year Parts Warranty

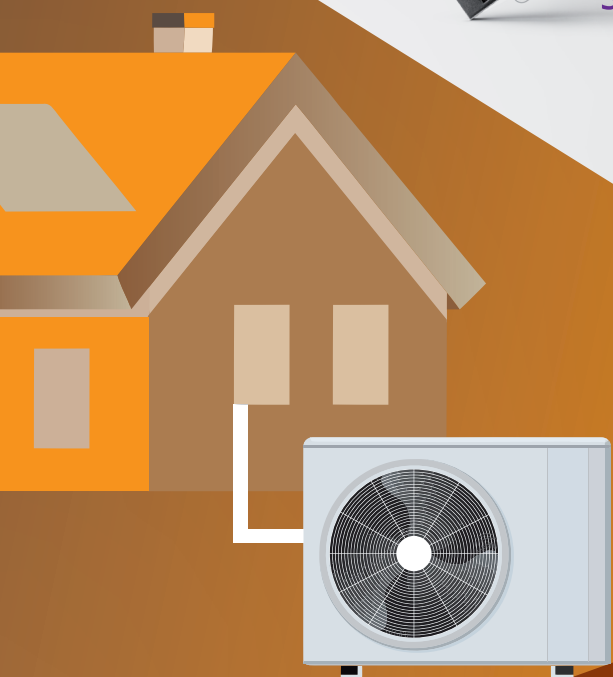

Best Features



Leakage Detection

Follow me®

Gold Fin® Condenser



Smartphone App



Enhanced Heating



Quiet Running



DC Inverter

Specification

Model No.	Indoor Unit	0-09-HP-WMAH-230A	0-12-HP-WMAH-230A	0-18-HP-WMAH-230A	0-24-HP-WMAH-230A
	Outdoor Unit	0-HH-09-HP-C-230	0-HH-12-HP-C-230	0-HH-18-HP-C-230	0-HH-24-HP-C-230

Capacity & Performance

Cooling Capacity	Btu/h	9000	12000	17000	24000
SEER	Btu/W	25.0	22.5	20.0	20.5
Heating Capacity	Btu/h	10900	11800	18000	24000
HSPF		11.2	12	10.3	11.5
Indoor noise level (Hi/Mi/Lo)	dB(A)	42/33/24.5	43/36/24	45.5/36/26.5	47.5/44/36.5
Outdoor noise level (dB(A)	59	57	59	61

Electrical Parts

Power Supply	Ph-V-Hz	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph
Minimum Circuit (Disconnect)	A	9.0	9.0	18.0	20.0
Maximum Fuse (Breaker)	A	15.0	15.0	25.0	30.0

Dimensions & Weight

Net Dimension	Indoor	inch	32.87 x 7.80 x 11.02	32.87 x 7.80 x 11.02	38.98 x 8.58 x 12.40	46.69 x 10.16 x 13.39
	Outdoor	inch	31.50x13.11x21.81	31.50 x 13.11 x 21.81	33.27 x 14.29 x 27.64	37.24 x 16.54 x 31.89
Packing Dimension	Indoor	inch	35.83 x 10.63 x 13.98	35.83 x 10.63 x 13.98	41.93 x 11.81 x 15.75	49.80 x 16.53 x 13.39
	Outdoor	inch	36.22 x 15.35 x 24.21	36.22 x 15.35 x 24.21	37.99 x 15.55 x 29.72	42.91 x 19.69 x 34.06
Net weight	Indoor	lbs	19.84	19.84	26.89	40.12
	Outdoor	lbs	88.2	88.2	107.4	135.58
Gross Weight	Indoor	lbs	25.35	26.68	34.83	50.26
	Outdoor	lbs	93.7	93.7	115.1	148.81

Refrigerant & Piping

†Refrigerant R410A	oz	R410A/52.9	R410A/52.9	R410A/68.8	R410A/91.7
Piping Size Liquid/Gas side	inch	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"

National Average Annual Operating Costs

Cooling Cost*	\$	45	67	107	148
Heating Cost*	\$	196	198	353	421

* Data provided by AHRI



Version Date 8-12-2021

† Starting charge does not guarantee line charge.
Running pressure must be checked by a technician.

www.mrcool.com